
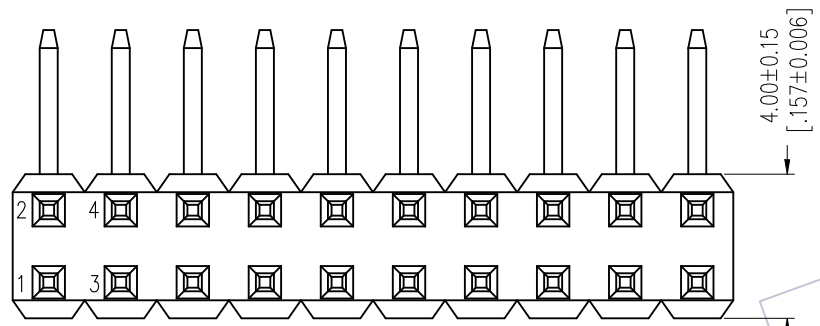


HSF

NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN) $\Delta 2$

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)


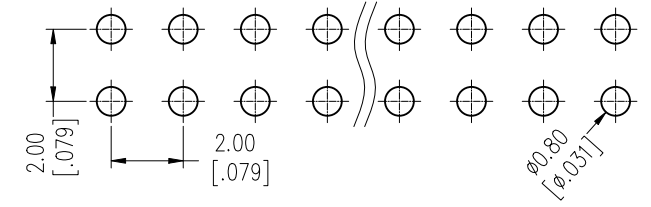


Ordering Information

1215-12 XX XX R XXX C 0 XX $\Delta 1$

$\Delta 3$ $\Delta 2$ $\Delta 1$

No. of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row:02~40	G0=Gold Flash	L=A+B+D+2.5	Material	0=PE Bag	01~99
	G3=10u"Gold	Standard:100=10.0	C=PA9T	T=Tube	
	G4=15u"Gold				
	G5=30u"Gold				
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

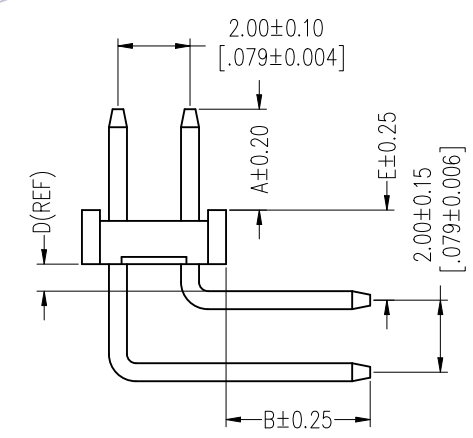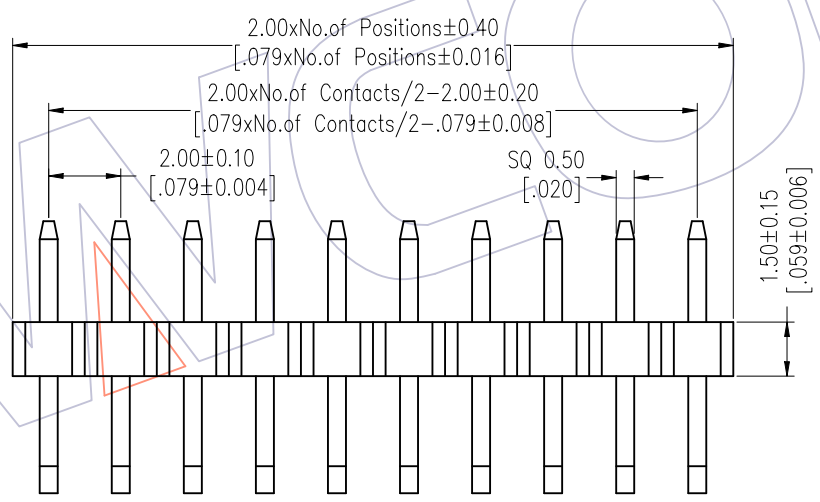

Item	Pin Length	A	B	E	Mating
Standard	10.00	2.80	4.00	2.50	2240 2243 2263 2272
Alternate					

A3	2020/06/11	Modify Pin 02~40P	$\Delta 3$	Drawing	OPERATION	DRAW	DATE	SCALE	Fit	PART NO. 1215-12XXXXRXXXCOXX $\Delta 1$
A2	2019/02/28	Modify	$\Delta 2$	Dwg	x.X ± 0.40	Drawing	2020/06/11	UNIT	mm	
A1	2018/01/18	Modify P/N	$\Delta 1$	-----	x.XX ± 0.25	CHECK	DATE	SIZE	A4	TITLE: PH2.00 DUAL ROW 90° H=1.5 PLANE BENDING
A0	2012/04/18	NEW	-----	-----	x.XXX ± 0.15	APPROVE	DATE	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	-----	Angle ± 3°	APPROVE	DATE	PROJ.	ϕ	Customer NO.
					DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com