


No.3: 载带须依照逆时针方向卷装 (如图所示) 载带尾端留空依《卷带包装检验规范》, 并贴上标签。(650PCS/卷)

No.2: 将产品放入载带凹槽后, 用盖带封装 注意: 盖带与承载带的拉力30g-120g 产品放入的方向须与图示一致, 不可反装

No.1: 产品包装前, 注意载带要留空160mm以上, 以及卷盘送载带的方向按逆时针旋转

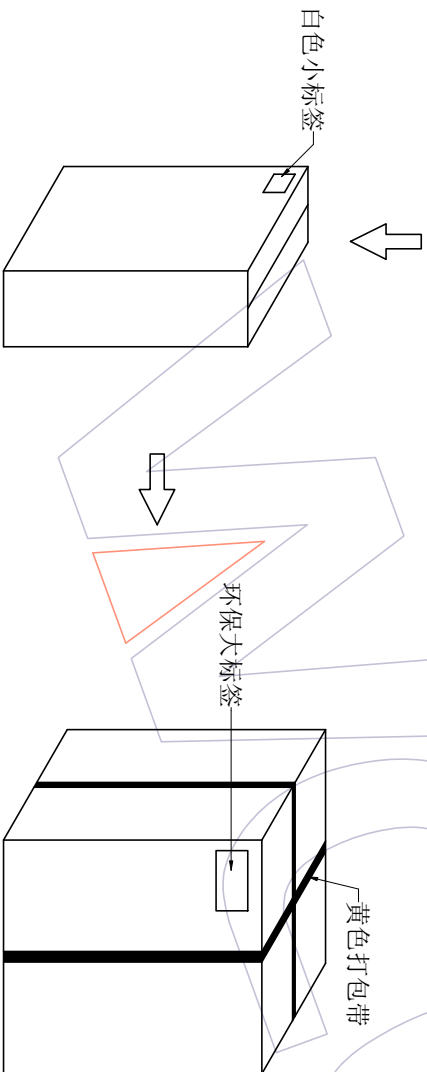

No.4: 将卷盘套上PF-32防水袋, 放入1包干燥剂, 真空机封口后装入内箱, 用封箱胶封装好, 并贴上标签。

No.5: 将内箱装入外箱, 封箱, 打包, 贴标签。(3内箱/外箱)

Pin	载带料号	W	S	F	PCS/Reel	PCS/内箱	PCS/外箱
10P	TR3612-FN010M07601	24.0±0.30	/	11.50±0.15	650	1950	5850
12P	TR3612-FN012M07601	24.0±0.30	/	11.50±0.15	650	1950	5850
14P	TR3612-FN014M07601	24.0±0.30	/	11.50±0.15	650	1950	5850
16P	TR3612-16G2402	24.0±0.30	/	11.50±0.15	650	1950	5850
18P	TR3612-FN018M07601	24.0±0.30	/	11.50±0.15	650	1950	5850
20P	TR3612-FN020M07601	24.0±0.30	/	11.50±0.15	650	1950	5850
22P	TR3612-FN022M07601	24.0±0.30	/	11.50±0.15	650	1950	5850
24P	TR3612-FN024M07601	24.0±0.30	/	11.50±0.15	650	1950	5850
26P	TR3612-FN026M07601	24.0±0.30	/	11.50±0.15	650	1950	5850
28P	TR3612-FN028M07601	24.0±0.30	/	11.50±0.15	650	1950	5850
30P	TR3612-FN030M07601	32.0±0.30	28.4±0.10	14.20±0.15	650	1300	3900
32P	TR3612-FN032M07601	32.0±0.30	28.4±0.10	14.20±0.15	650	1300	3900
34P	TR3612-FN034M07601	32.0±0.30	28.4±0.10	14.20±0.15	650	1300	3900
36P	TR3612-FN036M07601	32.0±0.30	28.4±0.10	14.20±0.15	650	1300	3900
38P	TR3612-FN038M07601	32.0±0.30	28.4±0.10	14.20±0.15	650	1300	3900
40P	TR3612-FN040M07601	44.0±0.30	40.4±0.10	20.20±0.15	650	1300	3900

WCON Hardware Electronics Co., Ltd

变更记事		工程图		刘胜		2019/05/23		SCALE		FIT	
版次	日期	变更	说明	变更	描述	变更	日期	变更	描述	变更	日期
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	APPROVE		UNIT	mm	SIZE	A4
A0	2019/05/23	NEW						SHEET	1/1	料号	3612-SXXX-061XXR01
0.8mm Board to Board, XFP, Female, SMT, W/T Post&CAP, H2-6, 15 卷装规范											