

HSF

NOTES:
 Rated Current: 0.5~1.0 AMP. Δ
 Contact Resistance: 25m Ω Max.
 Withstand Voltage: 500V
 Insulation Resistance: 10000M Ω Min.
 Operation Temperature: -55 $^{\circ}$ C to +125 $^{\circ}$ C
 Contact Material: Copper Alloy
 Contact Plating: Sn and Au over Ni
 Tail Material: Copper Alloy
 Tail Plating: Sn over Ni
 Main Body Material: High Temperature Thermoplastic(UL94V-0)
 CAP Material: High Temperature Thermoplastic(UL94V-0)

Ordering Information

3910-P XXX-067 M XX W R 1 W

No. of Pins
 010: 10 Pin
 012: 12 Pin
 020: 20 Pin
 100: 100 Pin


Plating Δ
 S3=Sel.10U" Gold/Tin
 S4=Sel.15U" Gold/Tin
 S5=Sel.30U" Gold/Tin

Blank=W/O WCON
 W=W/T WCON



Package
 R=Tape & Reel+Cap

"XX"=P/2

PIN	M	P/N	HOUSING PIN	DIM A
10~40PIN	0.12	CAP3910-G201	10-24	7.00
42~100PIN	0.15	CAP3910-G202	26-100	16.00

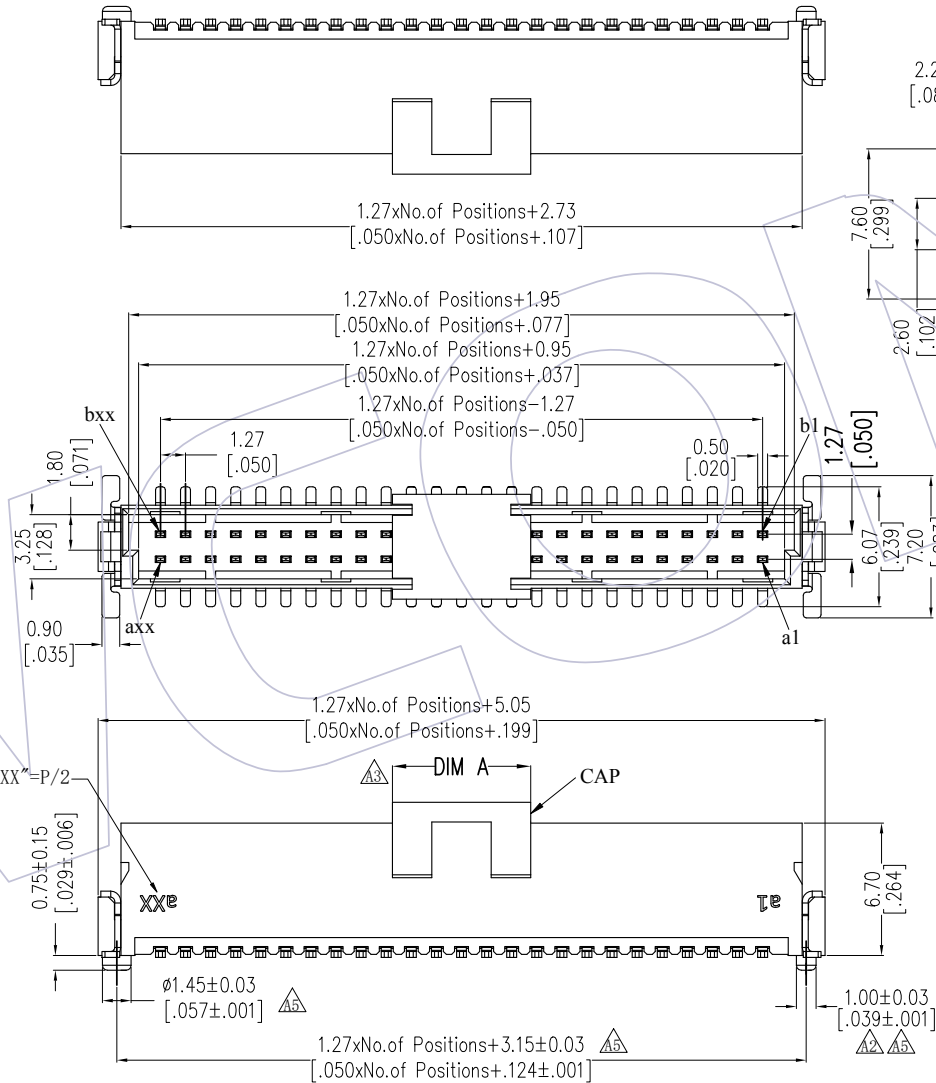

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

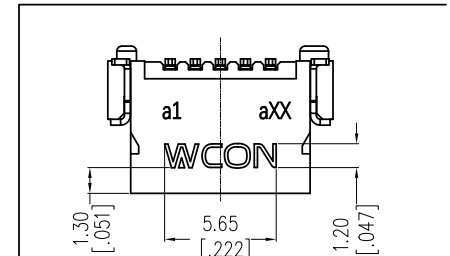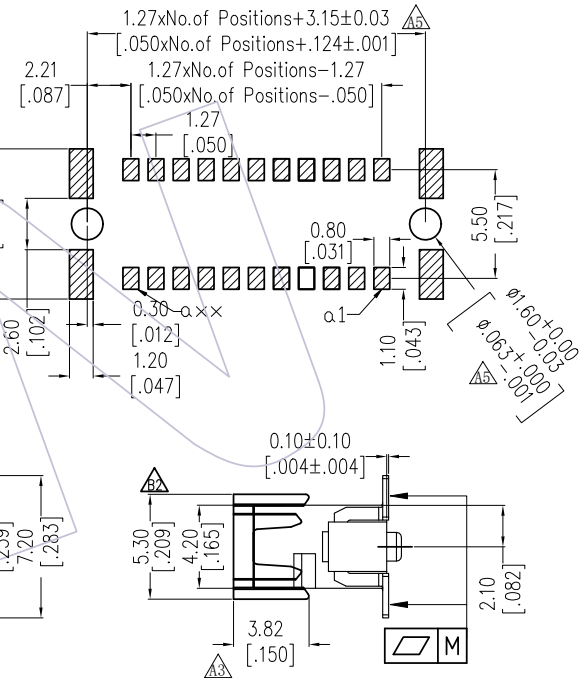

LOGO左右居中(2号Logo) Δ

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	SCALE	SHEET	CUSTOMER NO.
B2	2021/01/06	Modify CAP	XSR	OPERATION	DRAW	DATE	2021/01/06	SCALE	1:1	PART NO.	3910-PXXX-067MXXWR1(W) Δ
B1	2020/11/12	Add W/T WCON LOGO SPEC&P/N	XSR	x.x ±0.40	XSR	DATE		UNIT	mm	TITLE:	1.27mm Pitch SDC CONNECTORS MALE "E" TYPE H=6.70mm(TYPE Q)
B0	2019/12/12	Modify	XSR	x.xx ±0.25	CHECK	DATE		SIZE	A4	Customer NO.	
AO	2017/08/28	NEW		x.xxx ±0.15	APPROVE	DATE		SHEET	1/1		
				Angle ± 3°				PROJ.	ϕ		

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com