
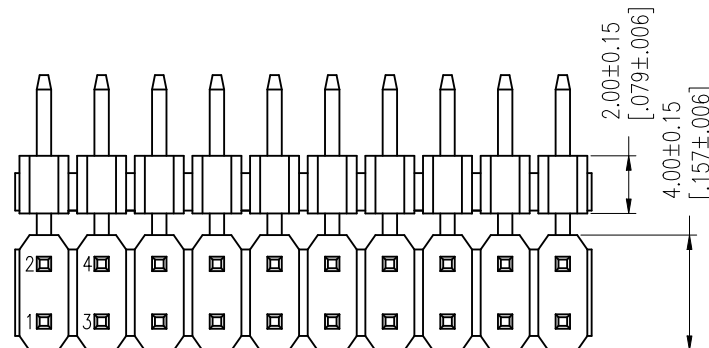


# HSF

NOTES:  
 Rated Current:2.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

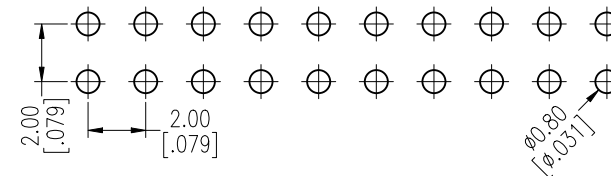

## Ordering Information

1220-22 XX XX R XXX C 0 XX

No. of Pins Per Row:02-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length(Short) L=A+B+D1+D2+4.2 Standard:	Insulator C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01-99
------------------------------	---	---	---------------------	-------------------------------	---------------------

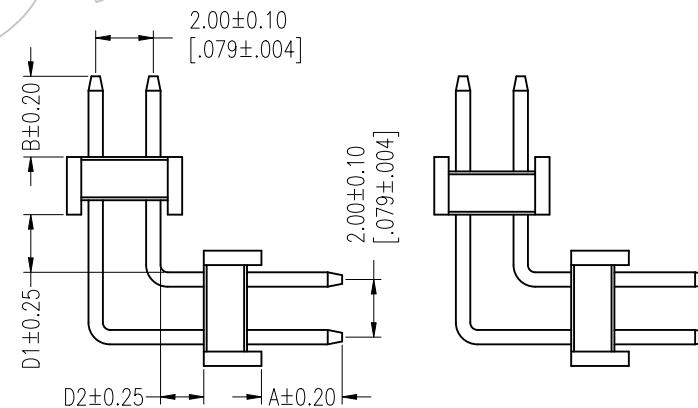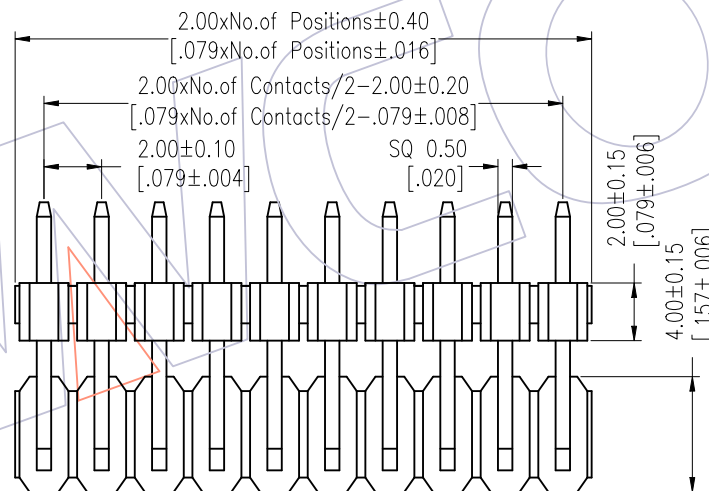

TYPE 3

TYPE 4

Item	Pin Length	A	D1	B	D2
Standard	---	2.80	---	2.80	---
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/19	Modify P/N	△	X.X ±0.40	Liu	2018.01.19	UNIT	mm	1220-22XXXXRXXXCOXX △
A0	2012/04/26	NEW	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: PH2.00 DUAL ROW DOUBLE PLASTIC 90° H=2.0 MIDDLE BENDING
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: salesks@wcon.com