


# HSF

**NOTES:**

Current Rating: 0.75AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au over Ni  
 Insulator Material: PA9T+33%GF UL94V-0  
 Or LCP+30%GF UL94V-0



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

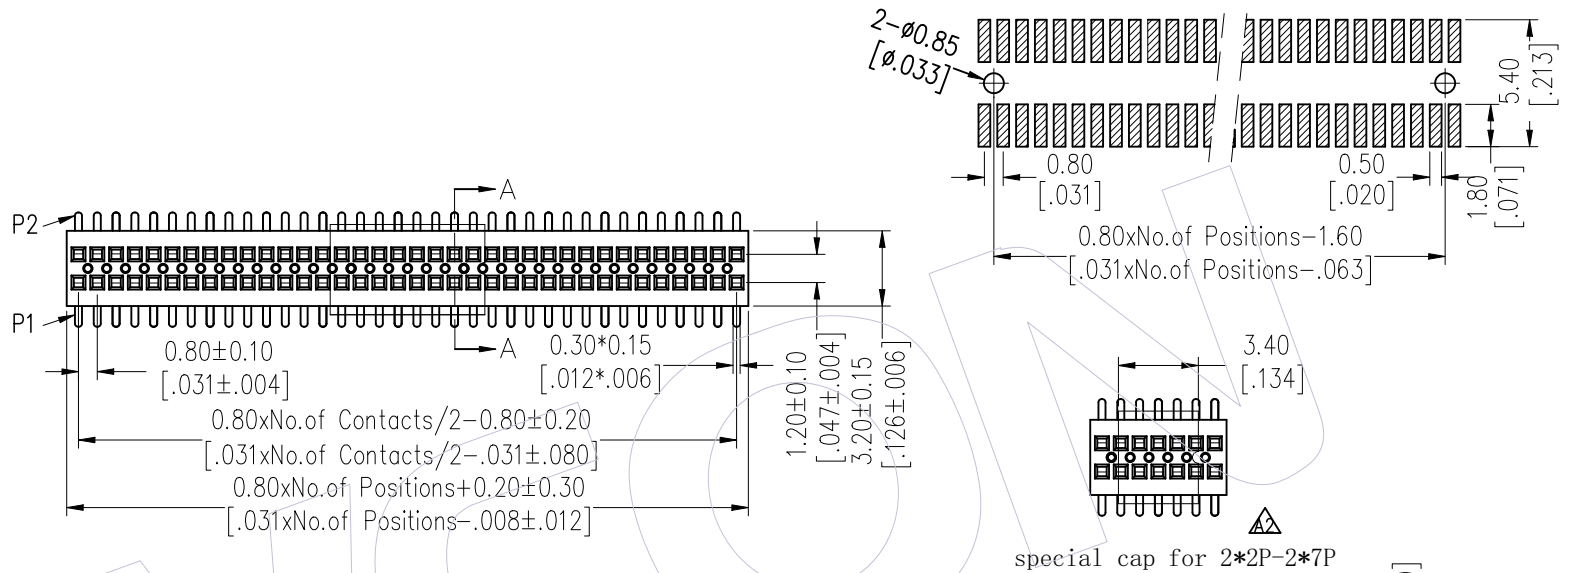

## Ordering Information

2631-2 XX M XX XTN X X

No. of Pins per Row: 02-50Pin  
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold  
 Insulator Material: C=PA9T, D=LCP  
 Packing: T=Tube, P=Tube+CAP, R=Tape&Reel+CAP  
 Series No. 1=Type 1, 2=Type 2

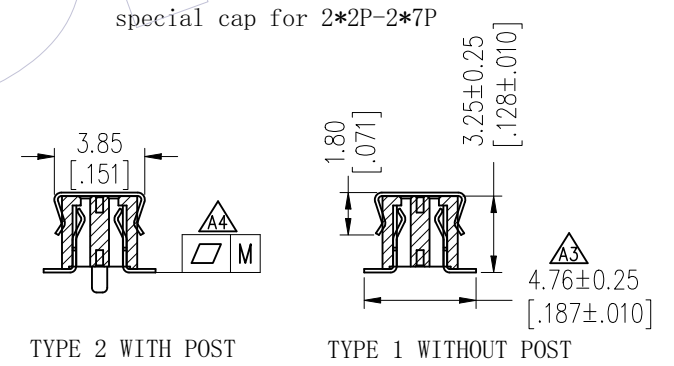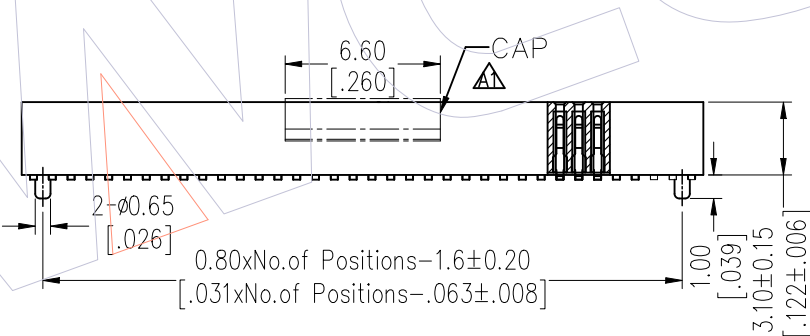

SECTION: A-A

Item	Pitch	Mating
Standard	0.80	1614
Alternate		

Pin(Per Row)	2-15P	16-30P	31-50P
M	0.10	0.12	0.15

A4	2022/02/02	Add Flatness	A4	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2017/12/01	Modify	A3	x.x ±0.40	XSR	2022/02/02	UNIT	mm	2631-2XXMXXXTNXX
A2	2016/09/21	ADD note	A2	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/07/05	NEW		x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	0.80mm Female Header DUAL ROW SMT H=3.10
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°			PROJ.		Customer NO.

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com