
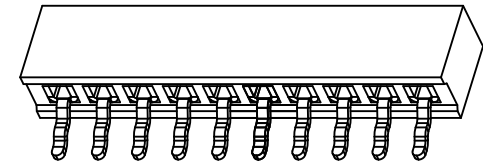


HSF

NOTES:
 Rated Current:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Au Or Tin Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

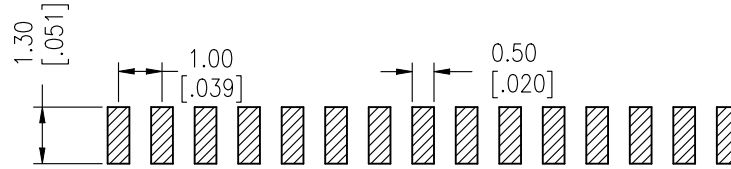

Ordering Information




2521-1 XX Z XX CUN X X

No. of Pins per Row: 02-40Pin

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 SN=Tin

Packing:
 T=Tube
 R=Tape&Reel

Series No.

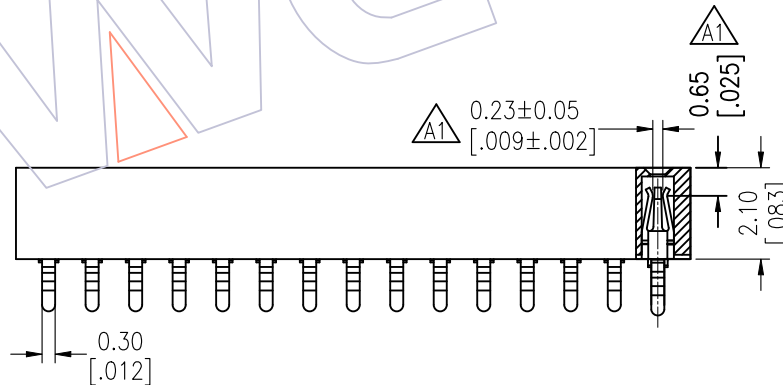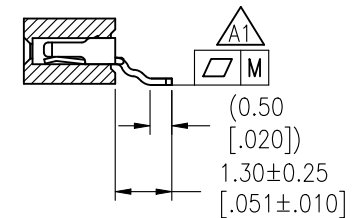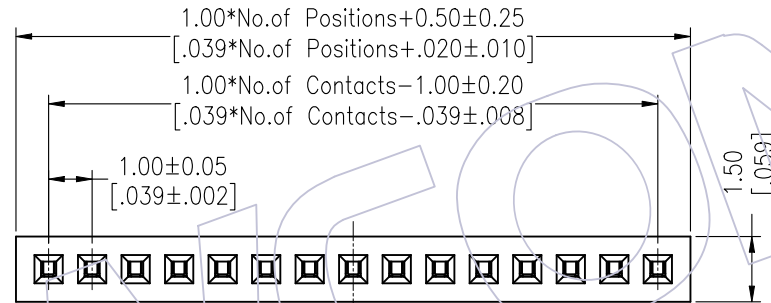

Pin(Per Row)	2-15P	16-30P	31-40P
M	0.10	0.12	0.18

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2023/02/03	Add Flatness	—	X.X ±0.40	XSR	2023/02/03	UNIT mm		2521-1XXZXXCUNXX
A0	2014/12/25	NEW	—	X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE:
				X.XXX ±0.15			SHEET 1/1		1.00mm Female Header Single Row 90°SMT Type
				Angle ± 3'	APPROVE	DATE	PROJ		Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com