



HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
Current Rating: 2.0AMP
Contact Resistance: 20m Ω EMax
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000M Ω EMin
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

Contact Material:Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material:PA9T+30%G.F UL94V-0

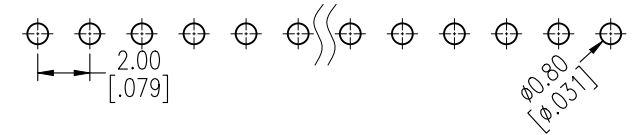

Ordering Information



2243-1 XX S XX CUN T 1

No. of Pins per Row: 02-40Pin

Contact Plating:

- G0=Gold Flash
- G3=10 μ "Gold
- G4=15 μ "Gold
- G5=30 μ "Gold
- S0=Gold Flash/Tin
- S3=10 μ "Gold/Tin
- S4=15 μ "Gold/Tin
- S5=30 μ "Gold/Tin
- SN=Tin
- SM=Matte Tin

Packing:
T=Tube

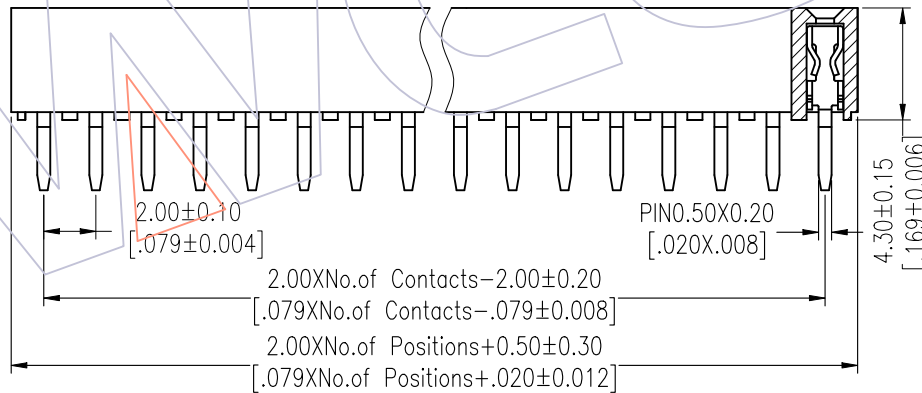

| Item | Pitch | Mating |
|-----------|-------|-----------|
| Standard | 2.00 | 1215/1220 |
| Alternate | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
|-----|------------|--------------------------|--------|-----------|-------|---------|------------|-------|--------------|
| | | | | X.X | ±0.40 | JYHuang | 2012/07/14 | UNIT | mm |
| | | | | X.XX | ±0.25 | CHECK | DATE | SIZE | A4 |
| | | | | X.XXX | ±0.15 | | | SHEET | 1/1 |
| A0 | 2012/07/14 | NEW | ----- | Angle | ± 3' | APPROVE | DATE | PROJ. | Customer NO. |
| | | | | DIM | TOL | | | | |

WCON

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan

Tel: +86 769 85358920 Tel: +86 512 57468408

Fax: +86 769 85358915 Fax: +86 512 57468468

E-mail: sales@wcon.com E-mail: salesks@wcon.com