
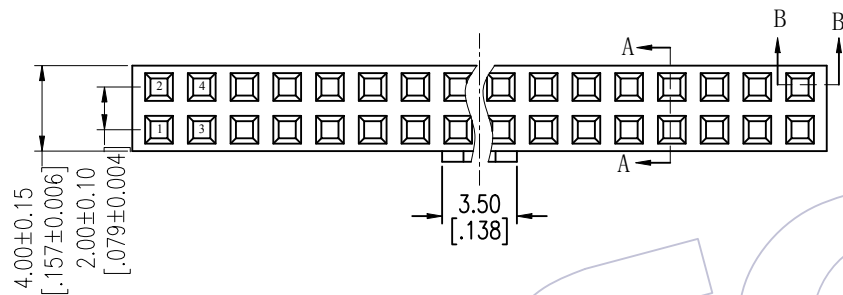


HSF


NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

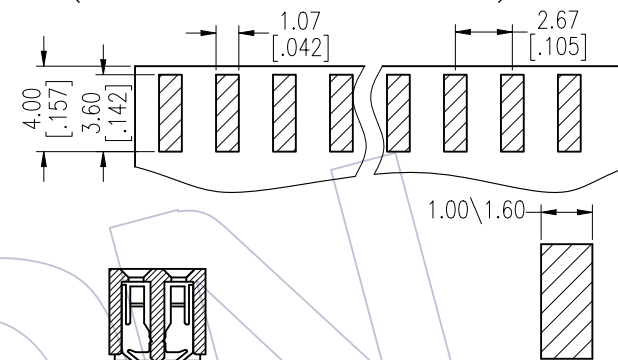

TYPE 1 W/O BUMP

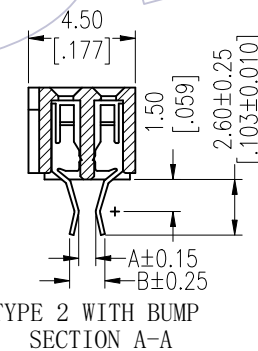

TYPE 2 WITH BUMP
 SECTION A-A

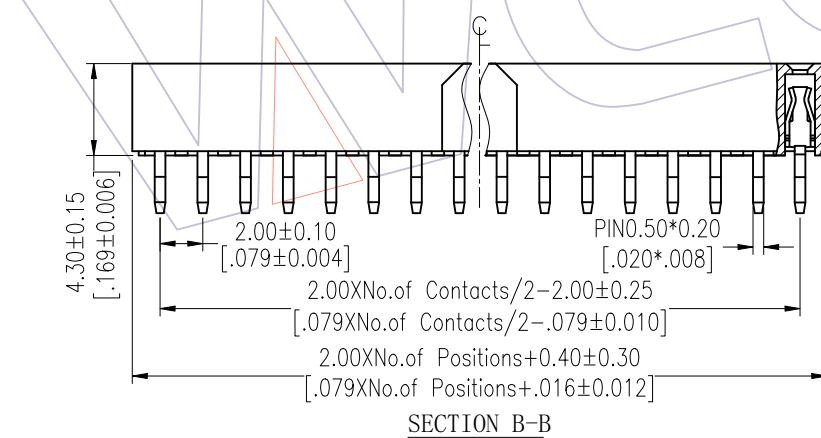

SECTION B-B

Ordering Information

2243N-2 XX C XX CUN T X

No. of Pins per Row: 02-40Pin

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Matte Tin

Packing:
 T=Tube

Series No.
 1=Type 1
 2=Type 2

Item	Pitch	Mating
Standard	2.00	1215/1220/3111
Alternate		

DIM: A	DIM: B	TITLE	Part No.
0.8	1.65	TYPE 1	2243N-2XXCXXCUNT
1.4	2.20		
0.8	1.65	TYPE 2	2243N-2XXCXXCUNT2
1.4	2.20		

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
X.X ±0.40	JYHuang	2012/07/12	UNIT mm		SEE TABLE
X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: FH2.00 Dual ROW Splint H=4.3 W=4.0
X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
Angle ± 3'			PROJ.		
DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com