


# HSF

NOTES:  
 Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

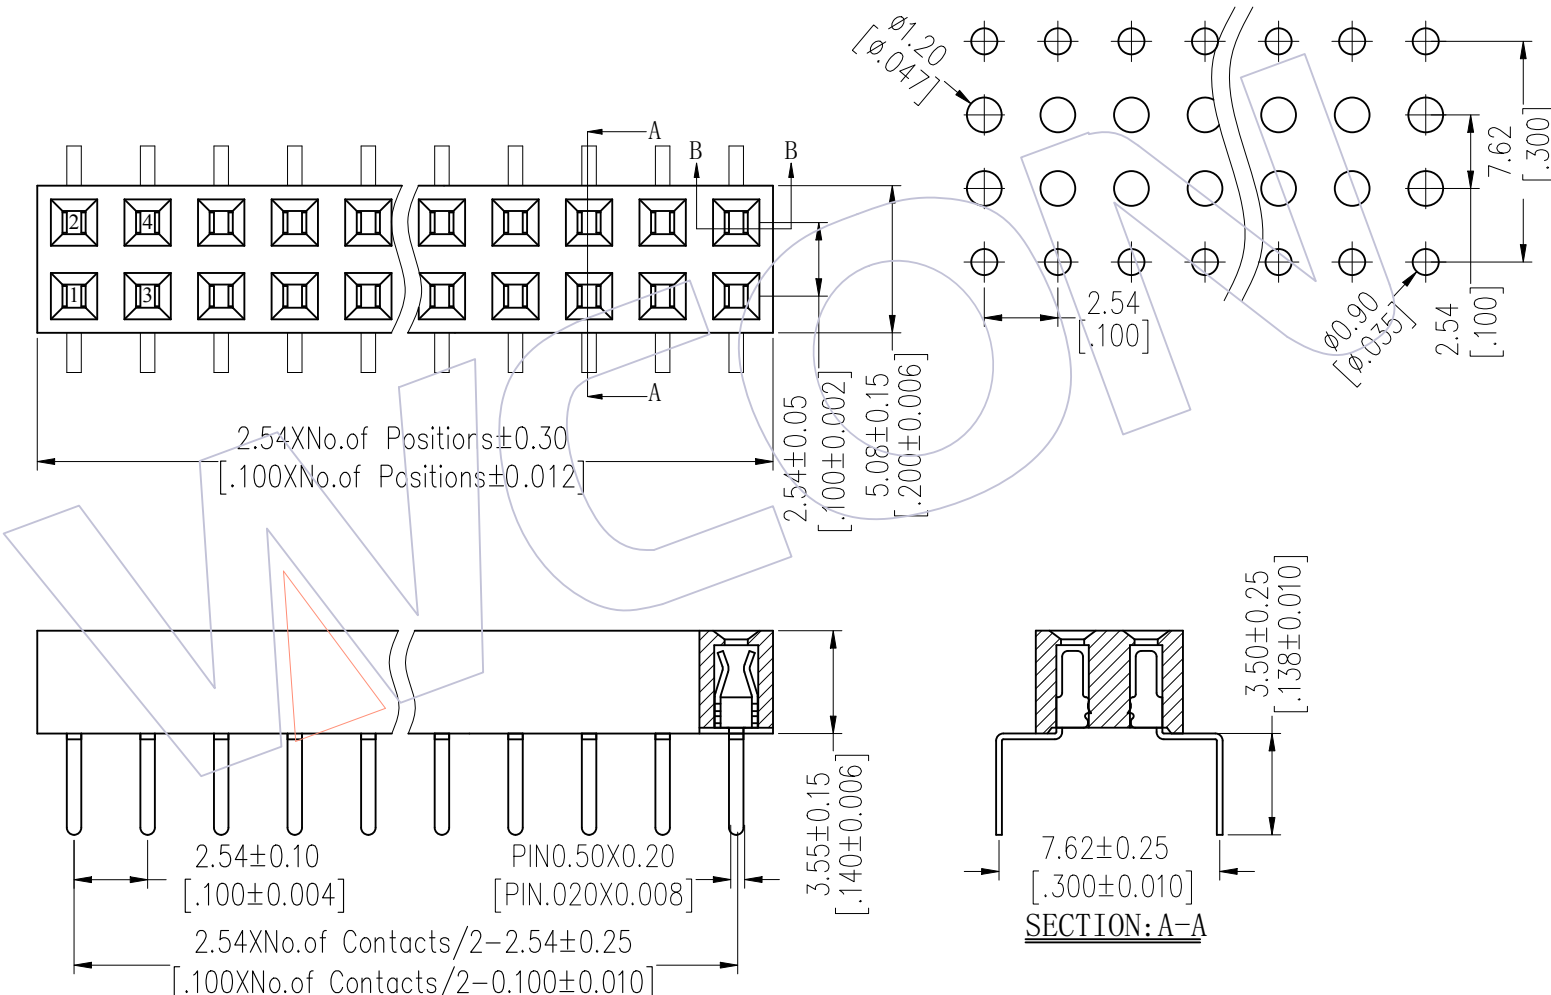

## Ordering Information

2135 - 2 XX W XX CUNT 1

No. of Pins per ROW: 02-40PIN

Contact Plating:  
 G0=Gold Flash  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold  
 S0=Gold Flash/Tin  
 S3=10μ"Gold/Tin  
 S4=15μ"Gold/Tin  
 S5=30μ"Gold/Tin  
 SN=Tin  
 SM=Matte Tin

Packing:  
 T=Tube

| Item      | Pitch | Mating         |
|-----------|-------|----------------|
| Standard  | 2.54  | 1115/1120/1125 |
| Alternate |       |                |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION   | DRAW    | DATE       | SCALE     | FIT | PART NO.                                    |
|-----|------|--------------------------|--------|-------------|---------|------------|-----------|-----|---------------------------------------------|
|     |      |                          |        | X.X ±0.40   | JYHuang | 2012/08/02 | UNIT mm   |     | 2135-2XXWXXCUNT1                            |
|     |      |                          |        | X.XX ±0.25  | CHECK   | DATE       | SIZE A4   |     | TITLE: FH2.54 DUAL ROW CENTIPEDE FOOT H=3.5 |
|     |      |                          |        | X.XXX ±0.15 | APPROVE | DATE       | SHEET 1/1 |     | Customer NO.                                |
|     |      |                          |        | Angle ± 3°  |         |            | PROJ.     |     |                                             |
|     |      |                          |        | DIM TOL     |         |            |           |     |                                             |

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com