



HSF

NOTES:
 Rated Current:1.0AMP
 Rated Voltage:100V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:250V AC/Minute
 Insulation Resistance:100MΩ min
 Operation Temperature:-25℃ to +85℃

Ordering Information

WF 1251 - T P XX 0 1

Contact Plating
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

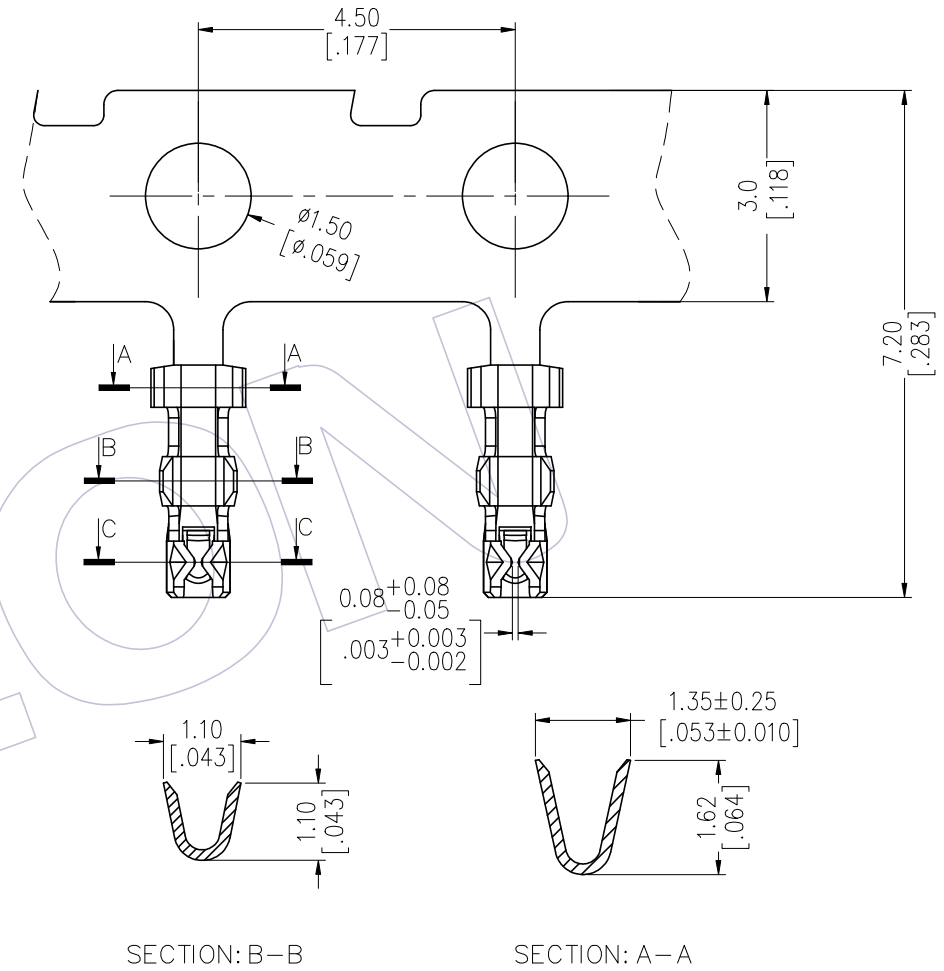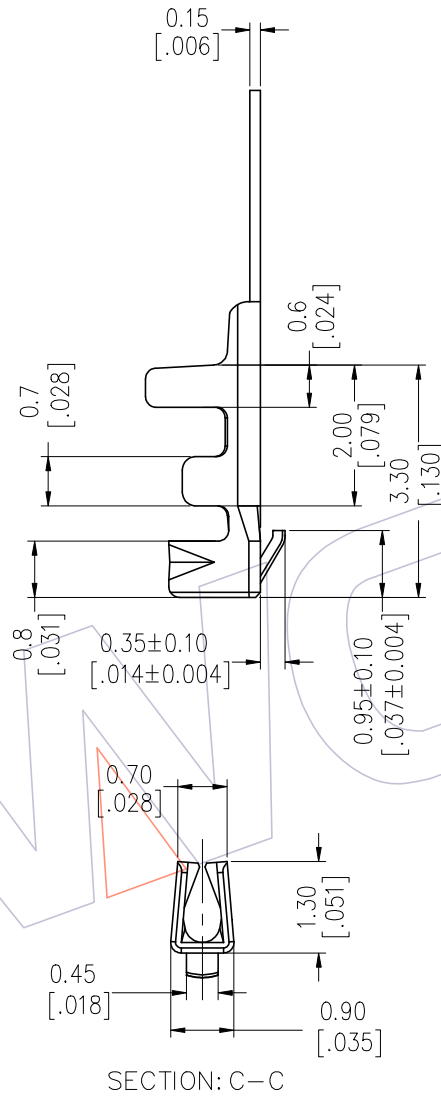

Specification & Ordering Information:

Part No.	Thickness	Material	Finish	Wire Range	Insulation O.D	Q'ty/Reel
WF1251-TPSN01	0.15	Phosphor bronze	Tin-Plated	AWG#28~#32	1.05~1.20mm	15,000PCS

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2022/05/30	Modify	—	X.X ±0.40	LZH	2022/05/30	UNIT	mm	SEE TAB
A1	2019/11/11	Modify	—	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
AO	2012/09/05	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	"M"TYPE 1.25 WAFER TERMINAL
				Angle ± 3°			PROJ.	⊕	Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com