





HSF

TECHNICAL SPECS:

Current Rating: 1.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000V_{RMS}
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
 Connecting Pin: ∅0.41mm
 Insulator Material: PPS+30%G.F.(UL94V-0)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

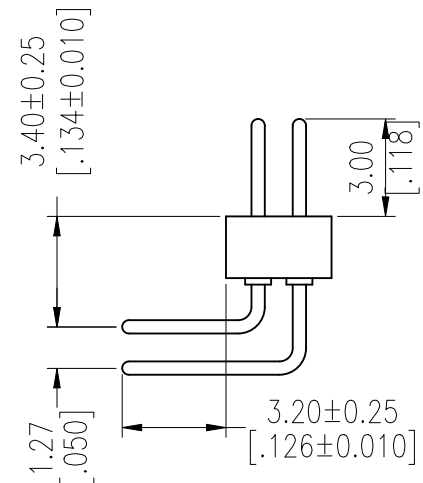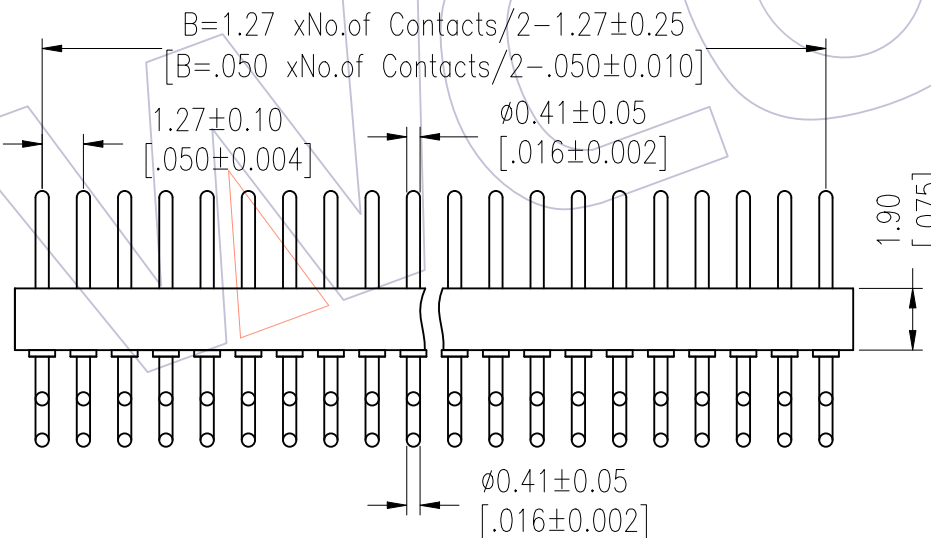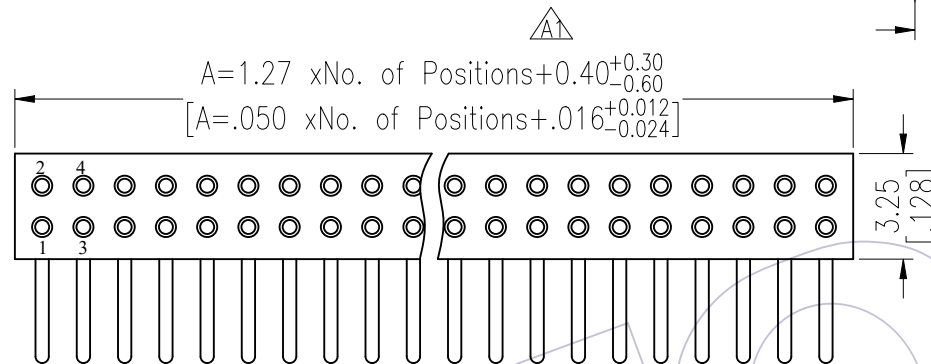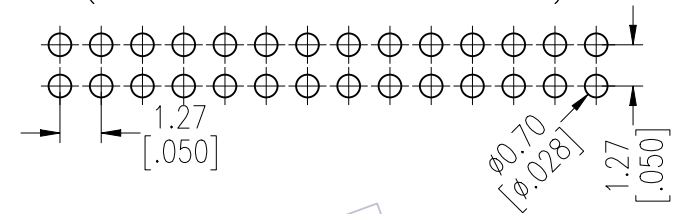

Ordering Information

3514-192 XX R XX 103 X 1

No. of Pin: 2~50PIN
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Packing: A=Tray, T=Tube

Item	Pitch	Mating
Standard	1.27	3524
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2013/05/21	modify drawing	-----	x.X ±0.40	Wang	2013/05/21	UNIT mm		3514-192XXRXX103X1
A0	2012/10/18	NEW	-----	x.XX ±0.25	CHECK	DATE	SIZE A4		TITLE:
				x.XXX ±0.15	APPROVE	DATE	SHEET 1/1		1.27mm MACHINED PIN HEADER
				Angle ± 3'			PROJ.		DUAL ROW 90° H=1.90 L=10.3
				DIM TOL					Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com