



HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Rated Current:3.0A
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to +85℃

Contact Material:Brass
 Contact plating:Au Or Sn Over Ni
 Insulator Material:PA66 (UL94V-0)

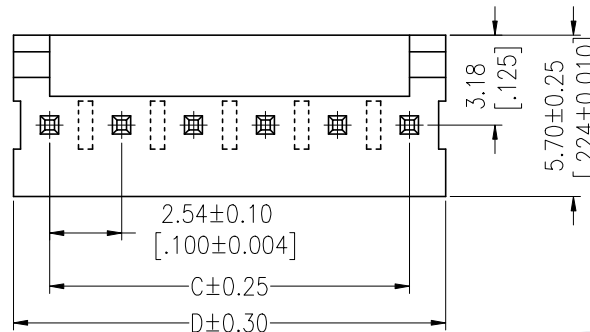


Specification & Ordering Information:

Circuit	Part No.	Dimension	
		C	D
02	WF2544-WS02XX1	2.54	5.08
03	WF2544-WS03XX1	5.08	7.62
04	WF2544-WS04XX1	7.62	10.16
05	WF2544-WS05XX1	10.16	12.70
06	WF2544-WS06XX1	12.70	15.24
07	WF2544-WS07XX1	15.24	17.78
08	WF2544-WS08XX1	17.78	20.32
09	WF2544-WS09XX1	20.32	22.86
10	WF2544-WS10XX1	22.86	25.40
11	WF2544-WS11XX1	25.40	27.94
12	WF2544-WS12XX1	27.94	30.48
13	WF2544-WS13XX1	30.48	33.02
14	WF2544-WS14XX1	33.02	35.56
15	WF2544-WS15XX1	35.56	38.10
16	WF2544-WS16XX1	38.10	40.64
17	WF2544-WS17XX1	40.64	43.18
18	WF2544-WS18XX1	43.18	45.72
19	WF2544-WS19XX1	45.72	48.26
20	WF2544-WS20XX1	48.26	50.80
21	WF2544-WS21XX1	50.80	53.34
22	WF2544-WS22XX1	53.34	55.88
23	WF2544-WS23XX1	55.88	58.42
24	WF2544-WS24XX1	58.42	60.96
25	WF2544-WS25XX1	60.96	63.50
26	WF2544-WS26XX1	63.50	66.04
27	WF2544-WS27XX1	66.04	68.58
28	WF2544-WS28XX1	68.58	71.12

Ordering Information

WF2544 - WS **XX** **X** **X** **X**

No. of pins: 02~28P
 Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, Blank=Tin
 Color: B=Black, T=Natural, W=White, E=Beige
 Packing: 0=PE Bag, T=Tube

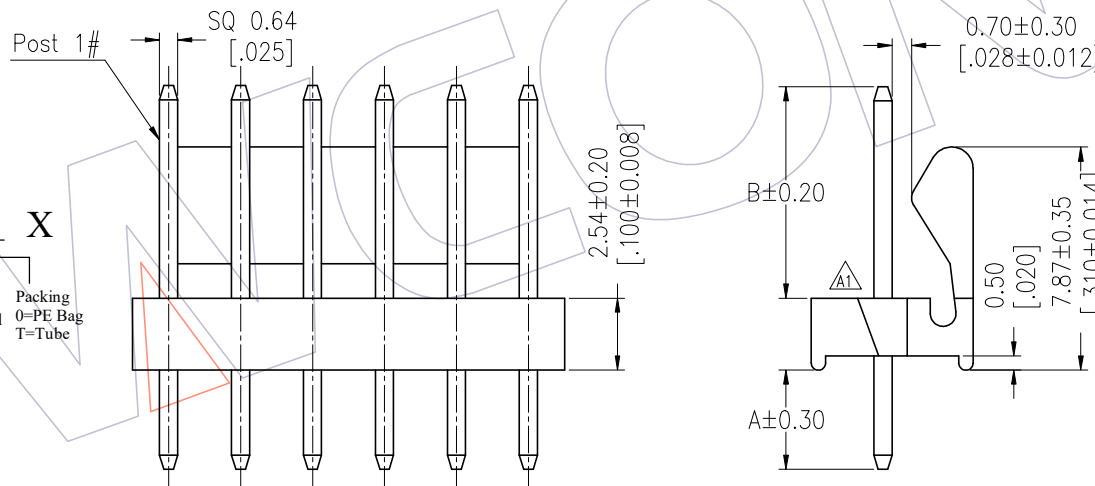

ITEM	A	B
Standard	3.60	7.36
Alternate		

		OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
		x.X	±0.40	DuYing		2023/02/14		UNIT	mm	inch		SEE TAB	
A1	2023/02/14	x.XX	±0.25	CHECK		DATE		SIZE	A4			TITLE: VH 2.54 WAFER 180° DIP	
AO	2012/09/08	x.XXX	±0.15	APPROVE		DATE		SHEET	1/1			Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE		DIM TOL		PROJ.	◆				

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com