

HSF

NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

3241-XX R XX BS XX


No. of Pins	Contact Plating	Color Insulator	Packing	Series No.
10 34	G0=Gold Flash	B=Black	T=Tube	1=Type 1
12 40	G3=10u"Gold	U=Blue		2=Type 2
14 44	G4=15u"Gold	W=White		
16 50	G5=30u"Gold			
20 60	S0=Gold Flash/Tin			
24 64	S3=10u"Gold/Tin			
26 80	S4=15u"Gold/Tin			
30 100	S5=30u"Gold/Tin			
32	SN=Tin			

Item	Pitch	Mating
Standard	1.27X2.54	5242
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/10/05	NEW	-----

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
x.X ±0.40	JYHuang	2012/10/05	UNIT	mm	3241-XXRXXBSXX
x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27*2.54 EJECTOR HEADER 90° FOUR ROW
x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
Angle ± 3'			PROJ.		
DIM TOL					

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

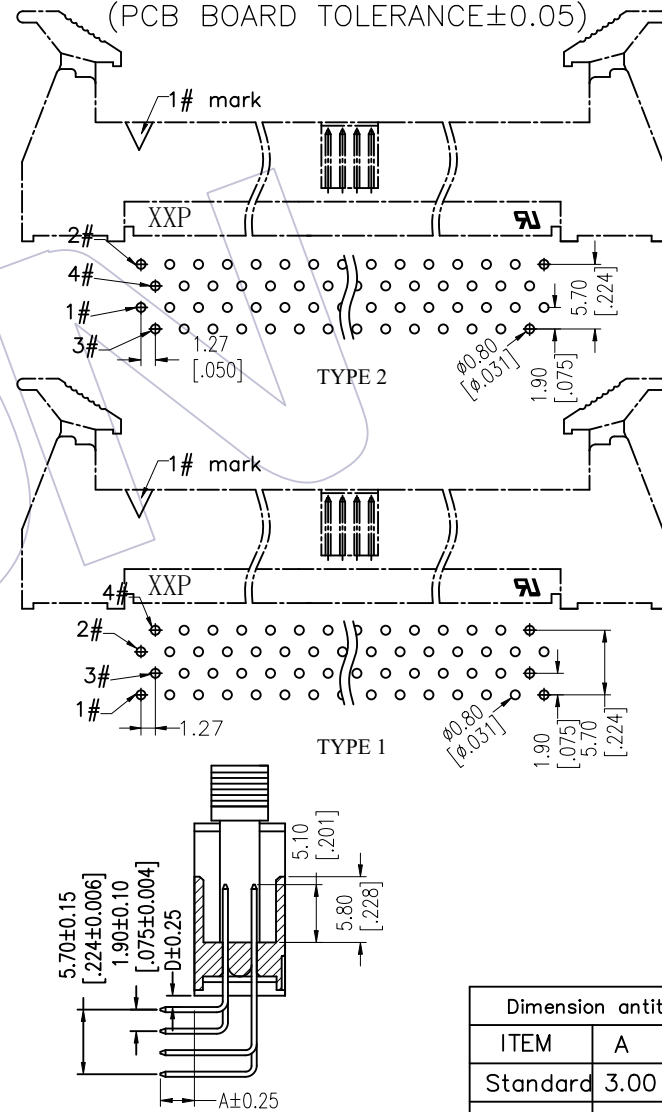

Dimension antitheses		
ITEM	A	D
Standard	3.00	1.00
Alternate		

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com