

HSF

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact plating: Au over Ni
 Insulator Material: PBT+30%G.F UL94V-0

10P-18P With Slot "M", Without Slot "N"
 20P-64P With Slot "M" and "N"


Ordering Information

3820-XX XX N X X 01A

Two Parts	No. of Pins	Contact Plating	Color Insulator	Latch Type
Conn+Cover	10 30	S0=Gold Flash/Ni	B=Black	L=Long Latch
	14 34	S3=10u"Gold/Ni	G=Grey(427C)	S=Short Latch
	16 40	S4=15u"Gold/Ni		N=Without Latch
	18 50	S5=30u"Gold/Ni		
	20 60			
	26 64			

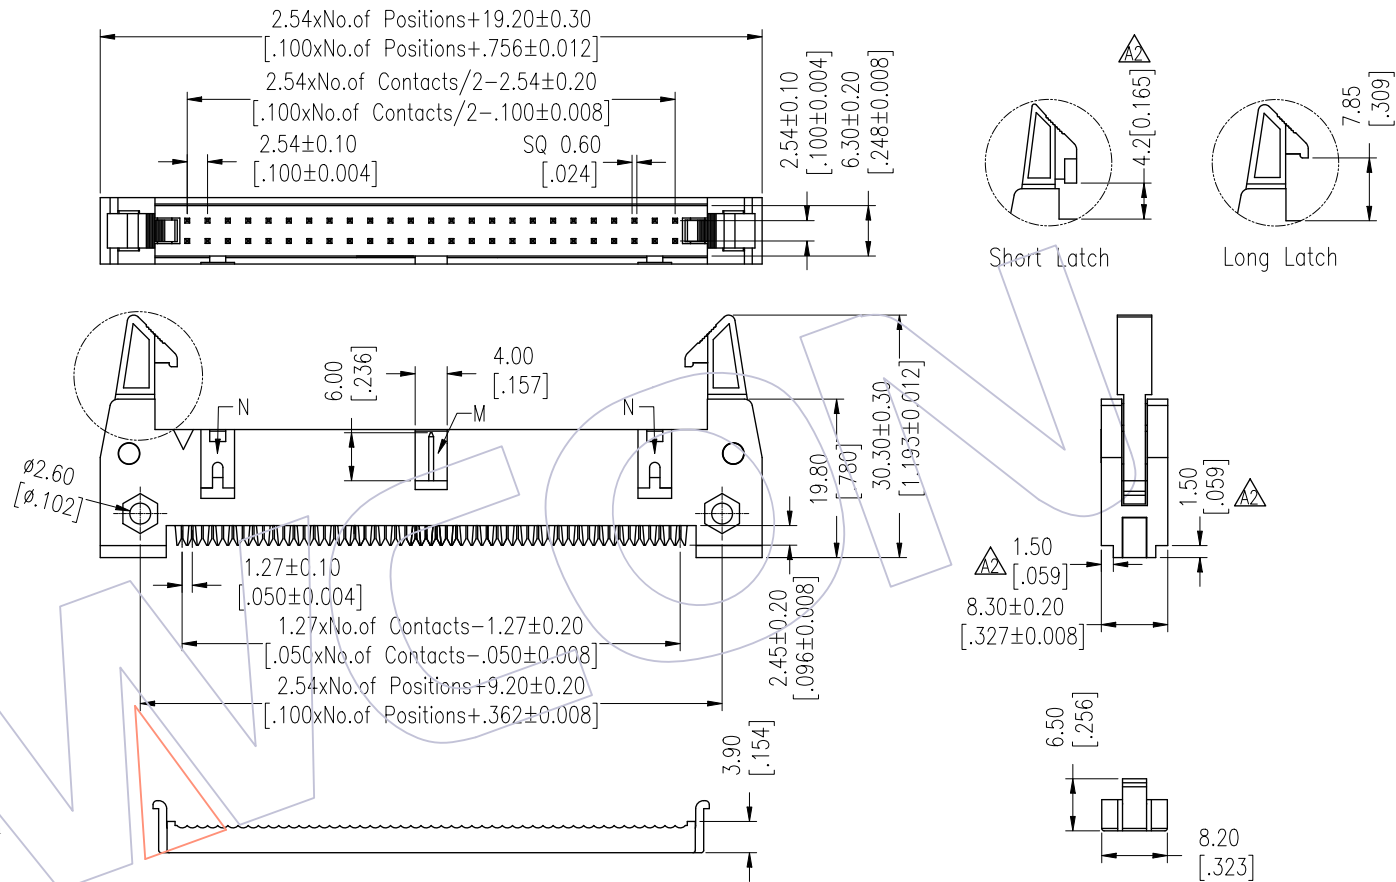

Item	Pitch	Mating
Standard	2.54	5212
Alternate		

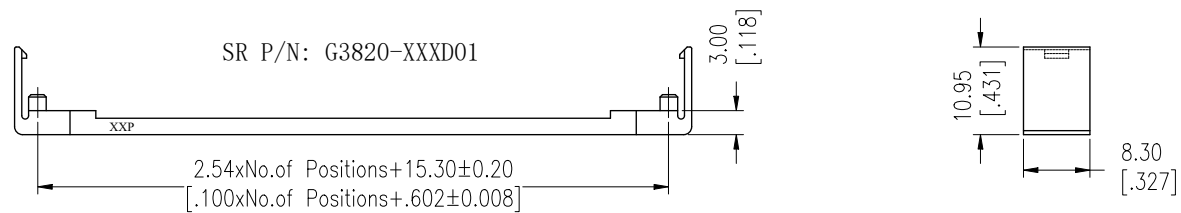

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	CUSTOMER NO.
A3	2022/05/12	Modify Size	△			Du Ying	OPERATION	SCALE	FIT
A2	2017/06/14	Modify				Ding	OPERATION	UNIT	mm
A1	2012/11/22	Modify The Contact Plating	----				CHECK	SIZE	A4
A0	2012/10/08	NEW	----				CHECK	SHEET	1/1
							APPROVE		

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com

Part No.	Title	Scale	Fit
3820-XXXXNXX01A	2.54 EJECTOR HEADER IDC TYPE	mm	A4