


HSF







NOTES:
 Current Rating:2A-Max.
 (Two by one contact energized,
 AT 30°C Rise, Room Temp21.0°C)
 Voltage Rating:200V/AC
 Contact Resistance:20mΩ Max.
 Withstand Voltage:650V AC For 1Minute
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-55°C to +125°C

Insulator Material:PA9T,G.F,UL94V-0,
 Black or Nature
 Contact Material:Copper Alloy
 Contact plating:
 Contact Area: XX u",Solder Area: 80u" Matte Tin Min.
 Over 50u" Nickel


Recommended Process:
 IR Stove,Peak temperature:260±5°C



3D VIEW

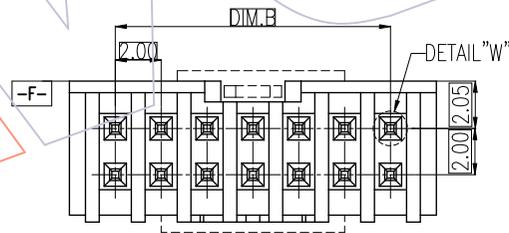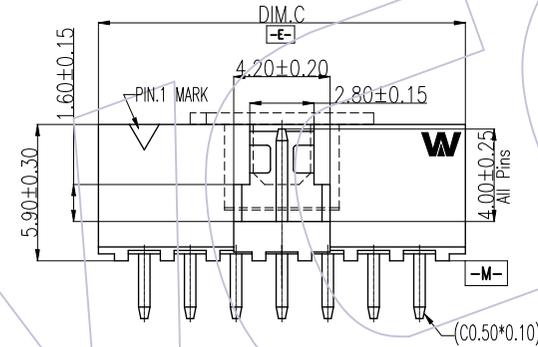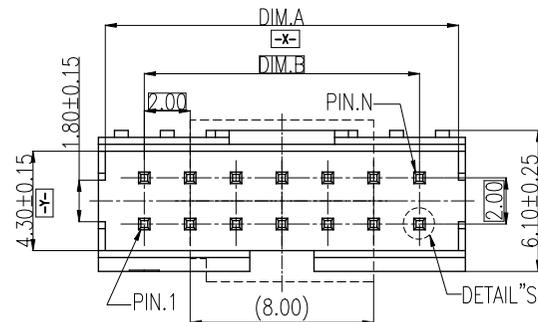

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)
 PCB BOARD THICKNESS:1.6~2.0

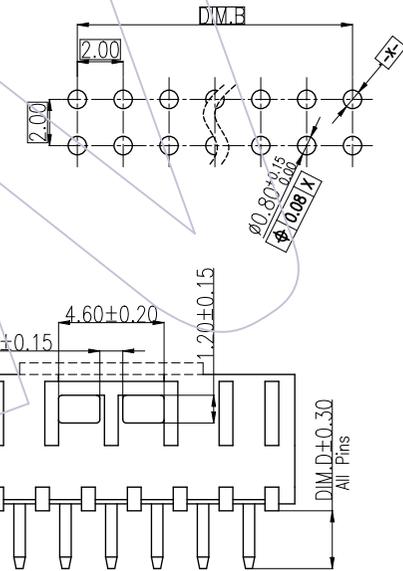

Ordering Information

31 22B- XX S XX X K00 X X

Box Header: 2.00mm
 PIN NO: 04=2*2, 06=2*3, 50=2*25, S=180°DIP
 Terminal Plated: W0:Sel 1U" AU/Matte Tin, W3:Sel 10U" AU/Matte Tin, W4:Sel 15U" AU/Matte Tin, W5:Sel 30U" AU/Matte Tin, SM: Matte Tin

Tail Length Code(DIM.D): 1=2.00, 2=2.50, 3=3.10, 4=3.70
 Packing: T=Tube (W/O CAP), R=Tape & Reel (W/T AP)
 K00=ALL PIN
 Color: B=Black, N=Nature

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.x ±0.40	Andrey	2022/02/24	UNIT	mm	3122B-XXSXXXK00XX
				x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/2	2.00mm Box Header, Double Row, S/T DIP, H=5.90 F Type W/T Lock
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com