
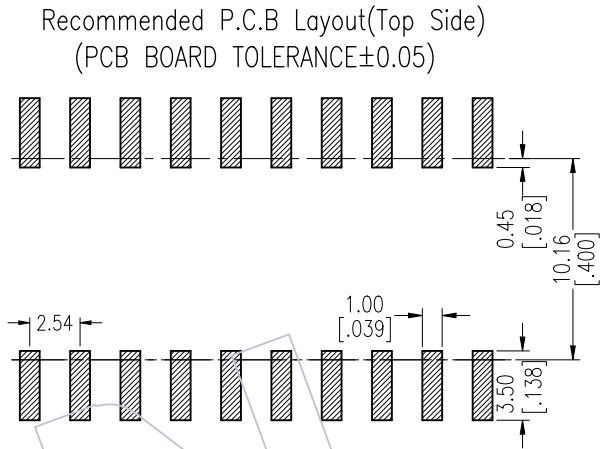


# HSF

**TECHNICAL SPECS:**

Current Rating:1.0AMP  
 Contact Resistance:10mΩ Max  
 Dielectric Strength: Min 1000Vrms  
 Mechanical Life: Min 100 cycles  
 Mating Pin:Ø0.40 to Ø0.56mm  
 Forces: (polished steel gauge Ø0.43mm)  
 Insertion:200g Max/Pin,Withdrawal:60g Min/Pin  
 Operation Temperature:-40°C to +105°C



Sleeve:Brass CuZn36Pb3(C36000),Sn over Ni  
 Contact Clip(4 finger):BeCu(C17200),Au or Sn over Ni  
 Insulator Material:PPS+30%G.F(UL94V-0)

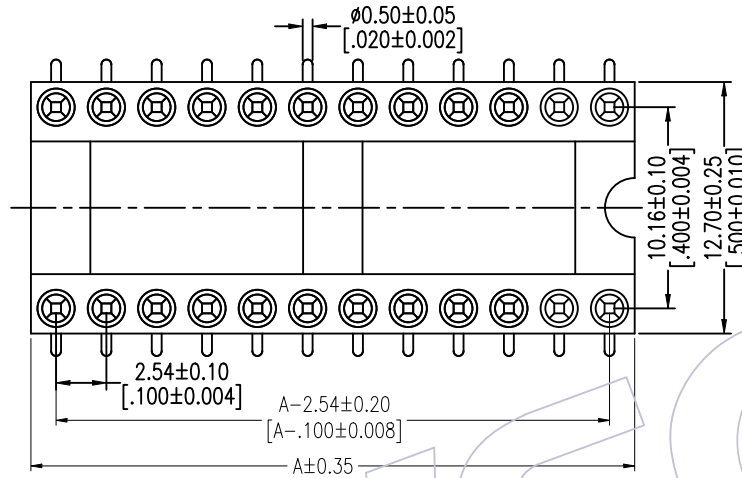

## Ordering Information

7110-303 XX M XX 074 X 1

Row of Pitch: 3=10.16mm  
 No. of Pin: See tab  
 Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin  
 Packing: T=Tube, R=Tape&Reel

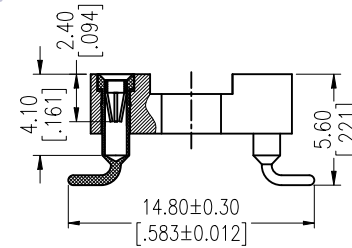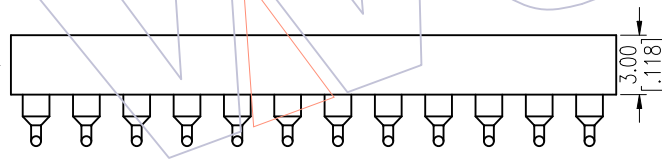

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim
		A
20	7110-30320MXX074X1	25.40
22	7110-30322MXX074X1	27.94
24	7110-30324MXX074X1	30.48
28	7110-30328MXX074X1	35.56
32	7110-30332MXX074X1	40.64

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/10/27	NEW	-----	X.X ±0.40	JYHuang	2012/10/27	UNIT mm		7110-303XXMXX074X1
				X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: 2.54mm IC SOCKET SMT H=3.0 L=7.43 Row of Pitch 10.16mm
				X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com