


NOTES:
 Rated Current: 9.0AMP
 Contact Resistance: 30mΩ max
 Withstand Voltage: 1500V AC/minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C

Contact Material: Brass
 Contact plating: Au Or Sn Over Ni
 Insulator Material: PA66(White Transparent UL94-V2 std)Or PA46(Natural UL94-V0)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

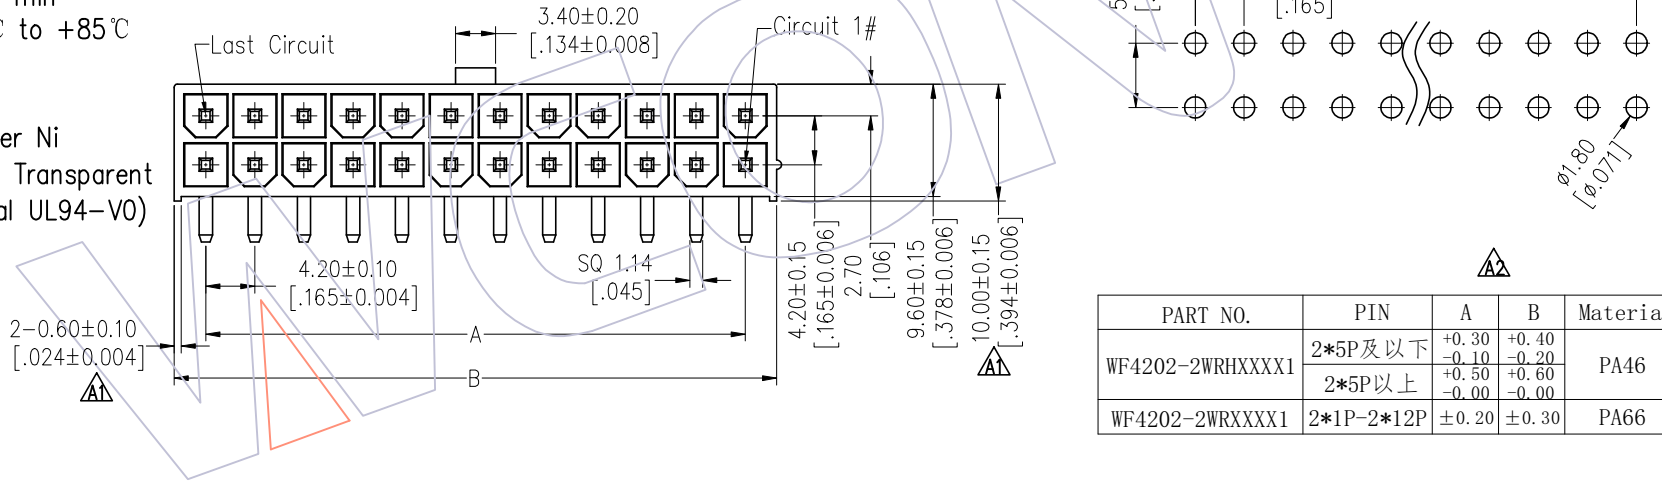


PART NO.	PIN	A	B	Material
WF4202-2WRXXXX1	2*5P及以下	+0.30 -0.10	+0.40 -0.20	PA46
	2*5P以上	+0.50 -0.00	+0.60 -0.00	
WF4202-2WRXXXX1	2*1P-2*12P	±0.20	±0.30	PA66

Ordering Information

WF4202 -2WR XX W A 1

- No. of Row Dual Row
- No. of pins 01~12P
- Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, Blank=Tin
- Insulation Material: H=PA46, Blank=PA66
- Color: B=Black, T=Natural, W=Transparent
- Packing: 0=PE Bag, A=Tray

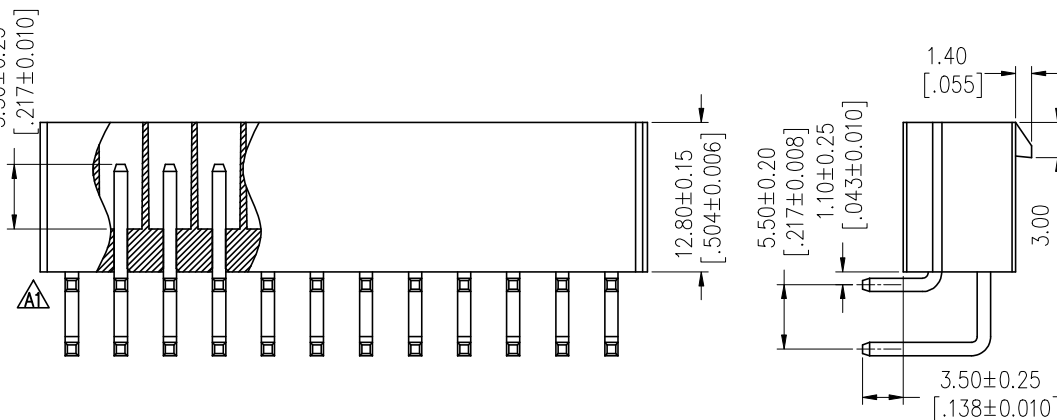

Specification & Ordering Information:

Circuit	Part No.	Dimension		Pcs /Tray
		A	B	
2x01	WF4202-2WR01WA1	---	5.40	410
2x02	WF4202-2WR02WA1	4.20	9.60	230
2x03	WF4202-2WR03WA1	8.40	13.80	160
2x04	WF4202-2WR04WA1	12.60	18.00	130
2x05	WF4202-2WR05WA1	16.80	22.20	100
2x06	WF4202-2WR06WA1	21.00	26.40	80
2x07	WF4202-2WR07WA1	25.20	30.60	70
2x08	WF4202-2WR08WA1	29.40	34.80	60
2x09	WF4202-2WR09WA1	33.60	39.00	60
2x10	WF4202-2WR10WA1	37.80	43.20	50
2x11	WF4202-2WR11WA1	42.00	47.40	50
2x12	WF4202-2WR12WA1	46.20	51.60	40

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	SCALE	FIT	PART NO.
A3	2023/03/06	Modify Color	DuYing	OPERATION	UNIT	mm	SEE TAB
A2	2019/05/15	MODIFY	Ding	±0.40	SIZE	A4	TITLE: 4.20 MINI FIT DUAL ROW 90° WITHOUT POST
A1	2013/05/22	MODIFY THE DRAWING	---	±0.25	SHEET	1/2	Customer NO.
A0	2012/09/19	NEW	---	±0.15	PROJ.	◆	
				Angle ± 3°			
				DIM TOL			

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com