
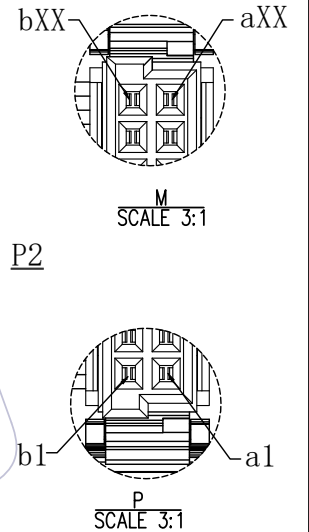
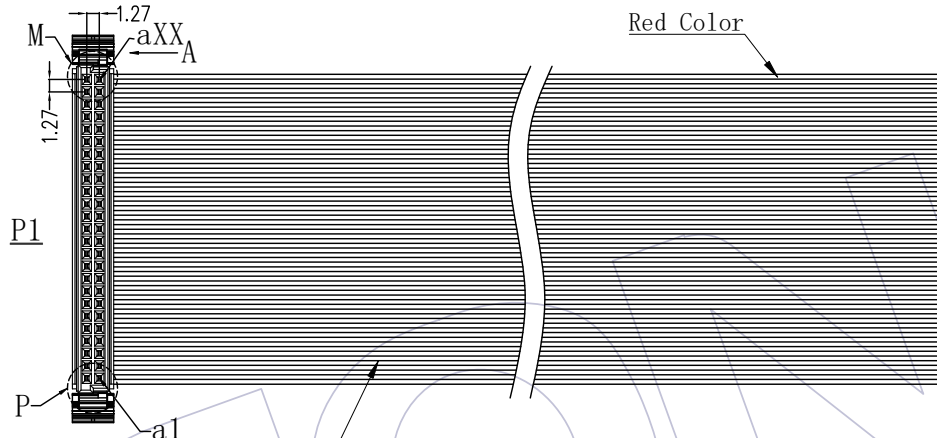


IDC HOUSING MATERIAL
 Insulation Material: HIGH TEMPERATURE
 THERMOPLASTIC(UL94V-0)
 Contact Material: COPPER ALLOY
 Contact plating: Au or Sn Over Ni
 SPECIFICATIONS
 Insulation Resistance: 5MΩ Min
 Contact Resistance: 1.0Ω Max, 10S
 Withstand Voltage: AC 300V
 The Cable Assembly Must 100% Test
 CABLE MATERIAL
 Conductor: 30AWG(7/0.1mm)

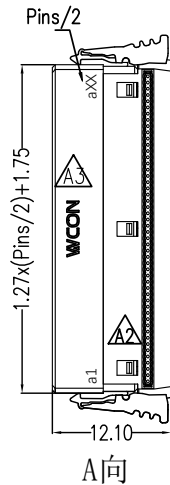

Ordering Information

F3911A - XX XX A B XXX 00X W

No. OF Pins: 12p 40p, 16p 50p, 20p 68p, 26p 80p, 32p
 Contact Plating: S3=Sel.10U" Gold /Tin, S4=Sel.15U" Gold /Tin, S5=Sel.30U" Gold /Tin
 Conn. Color: B=Black
 Length of Line: XXX
 Blank=W/O WCON, W=W/T WCON

CONNECT METHOD

P1 Red P2
 aXX ——— Open
 bXX ——— Open
 aXX ——— Open
 bXX ——— Open
 a1 ——— Open
 b1 ——— Open

L	TOLERANCE
≤300	±5
>300	±10

WIRE TYPE	PRAT NO.
F1U-A30GXXD0-XXXX-1	F3911A-XXXXABXXX003(W)
F1U-A30XXD0-XXXX-1T	F3911A-XXXXABXXX004(W)

NO.	PART NO.	NAME	TITLE	Q'TY	UNIT
②	3911-0XXUXXWX1	CONN.	1.27Pitch SDC IDC XXP HIGH TEMPERATURE THERMOPLASTIC BK	1	PCS
①	F1U-A30GXXD0-XXXX-1	WIRE	UL2678 PH0.635mm XXP 30AWG(7/0.1), PVC Grey Red Side	XXX	MM
	F1U-A30XXD0-XXXX-1T	WIRE	PH0.635mm XXP 30AWG(7/0.1),TPE Grey,Red Side	XXX	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	SCALE	FIT	PART NO.
A3	2020/11/12	Add W/T WCON LOGO SPEC&P/N	XSR	OPERATION	SCALE	FIT	F3911A-XXXXABXXX00X(W)
A2	2020/09/09	MODIFY	XSR	x.X ±0.40	UNIT	mm/inch	TITLE:
A1	2019/12/05	MODIFY	XSR	x.XX ±0.25	SIZE	A4	1.27mm SDC IDC/OPEN
A0	2018/10/10	NEW	Ding	x.XXX ±0.15	SHEET	1/1	Customer NO.
				Angle ± 3°	PROJ.		
				DIM TOL			

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com