


IDC HOUSING MATERIAL  
 Insulation Material: HIGH TEMPERATURE THERMOPLASTIC(UL94V-0)  
 Contact Material: COPPER ALLOY  
 Contact plating: Au or Sn Over Ni  
 SPECIFICATIONS  
 Insulation Resistance: 5MΩ Min  
 Contact Resistance: 1.0Ω Max, 10S  
 Withstand Voltage: AC 300V  
 The Cable Assembly Must 100% Test  
 CABLE MATERIAL  
 Conductor: 30AWG(7/0.1mm)

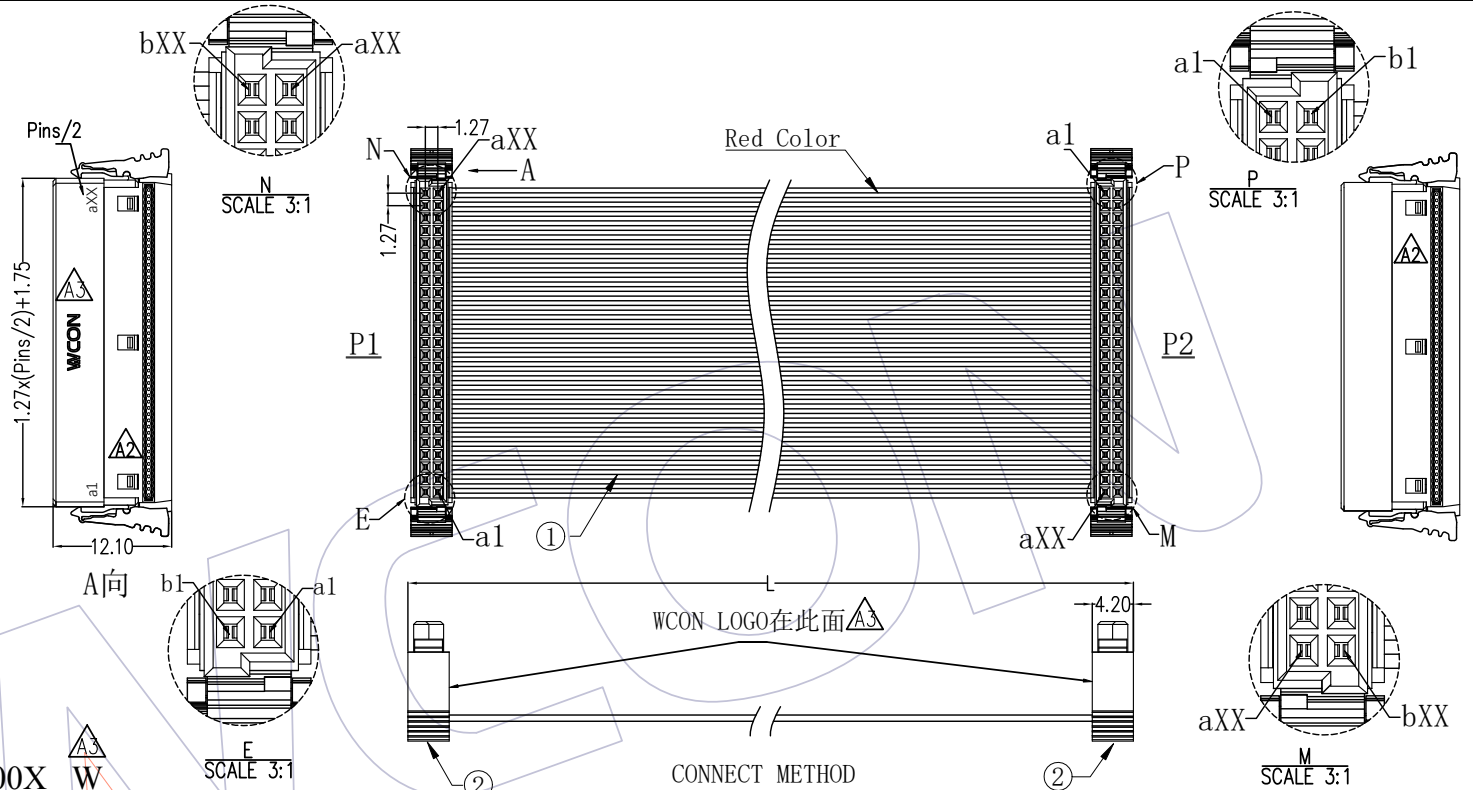

### Ordering Information

F3911C - XX XX B B XXX 00X W


No. Of Pins  
 12p 40p  
 16p 50p  
 20p 68p  
 26p 80p  
 32p

Contact Plating  
 S3=Sel.10U" Gold/Tin  
 S4=Sel.15U" Gold/Tin  
 S5=Sel.30U" Gold/Tin

Conn. Color  
 B=Black

Length of Line  
 Blank=W/O WCON  
 W=W/T WCON

### CONNECT METHOD



L	TOLERANCE
≤300	±5
>300	±10

WIRE TYPE	PRAT NO.
F1U-A30GXXD0-XXXX-1	F3911C-XXXXBBXXX003(W)
F1U-A30XXXD0-XXXX-1T	F3911C-XXXXBBXXX004(W)

NO.	PART NO.	NAME	TITLE	Q'TY	UNIT
②	3911-0XXUXXWX1	CONN.	1.27Pitch SDC IDC XXP HIGH TEMPERATURE THERMOPLASTIC BLACK	2	PCS
①	F1U-A30GXXD0-XXXX-1	WIRE	UL2678 PH0.635mm XXP 30AWG(7/0.1), PVC Grey Red Side	XXX	MM
	F1U-A30XXXD0-XXXX-1T	WIRE	PH0.635mm XXP 30AWG(7/0.1), TPE Grey,Red Side	XXX	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	XSR	OPERATION	DRAW XSR	DATE	SCALE	FIT	PART NO.
A4	2020/12/10	Correct CONNECT METHOD	XSR	OPERATION	DATE	2020/12/10	SCALE	FIT	PART NO.	F3911C-XXXXBBXXX00X(W)
A3	2020/11/12	Add W/T WCON LOGO SPEC&P/N	XSR	x.X ±0.40	CHECK	DATE	UNIT	mm/inch	TITLE:	1.27mm SDC IDC/1.27mm SDC IDC
A2	2020/09/09	MODIFY	XSR	x.XX ±0.25	APPROVE	DATE	SIZE	A4	Customer NO.	
A0	2018/10/10	NEW	Ding	x.XXX ±0.15			SHEET	1/1		
				Angle ± 3°			PROJ.			
				DIM TOL						

**WCON**

Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: sales@wcon.com