

HSF

SPECIFICATIONS:


Contact Resistance: 1Ω Max.
 Insulation Resistance: 5MΩ Min.
 Withstand Voltage: 300V DC,10s
 The Cable Assembly Must 100% Test

CABLE:

Insulator: UL 2651, Grey Red Side
 Contact: 28AWG(7/0.12mm)

IDC:

Insulator Material: PBT+30%G.F UL94V-0
 Contact Material: Brass
 Contact Plating: Au over Ni

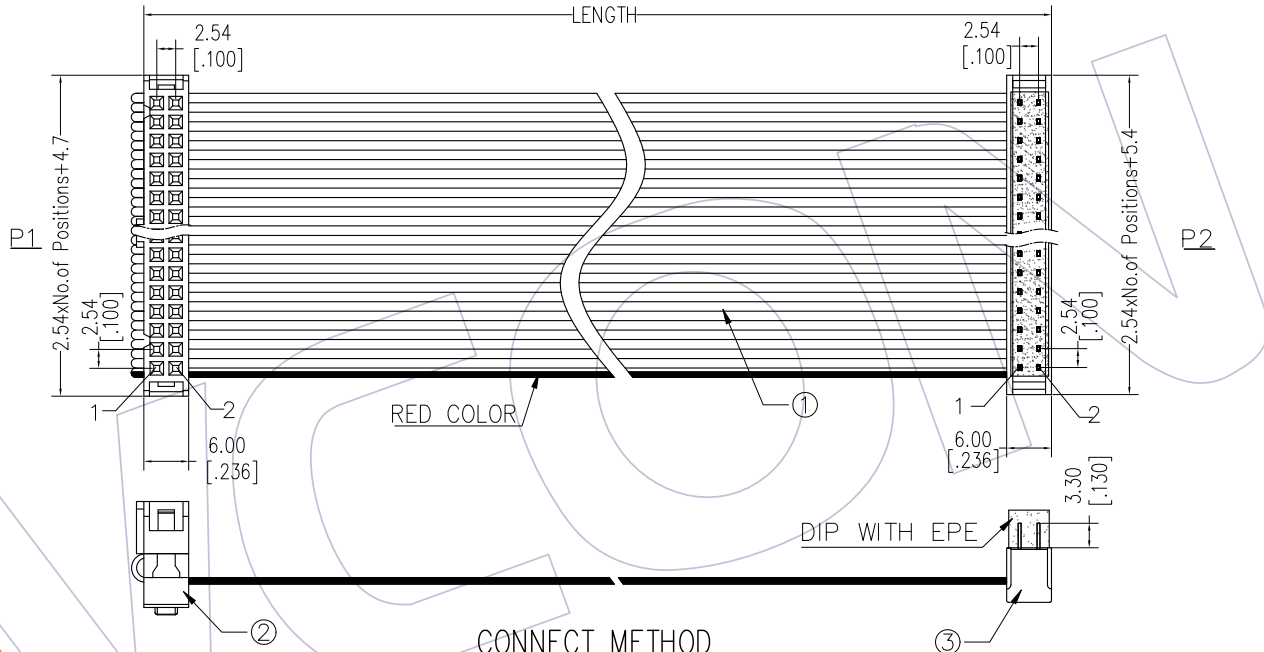

Ordering Information

FB12- XX XX F A X XXX - 04

No. OF Pins
04-64p

Contact Plating:
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Ni
 S3=10u"Gold/Ni
 S4=15u"Gold/Ni
 S5=30u"Gold/Ni
 SN=Tin

Connector Direction:
 F=Same Direction

Connector Color:
 B=Black
 G=Grey 427C

Length of Line(mm)

CONNECT METHOD

P1	Red	P2	1
1	Grey	1	1
2	Grey	2	2
3	Grey	3	3
	•••••		
XX	Grey	XX	XX

LENGTH	TOLERANCE
≤100	±5
101~1000	±10
1001~3000	±20
3001~	± Lx1%

NO.	PART NO.	NAME	TITLE	QTY	UNIT
③	5310-XXBXXX01	CONN.	2.54 DIP **P PBT Color:XXX Brass Plating **u" gold	1	PCS
②	G5210-XXDX01	SR	2.54mm IDC **P SR Black/Grey427C	1	PCS
①	5212-XXYXXXBW01	CONN.	2.54 IDC **P PBT Black/Grey427C Material:**, With Bump Plating **u" gold	1	PCS
①	F1U-C28GXXD0-XXXX-1	WIRE	UL2651 PH1.27mm **P 28AWG(7/0.12TC) PVC Grey Marking Red Side	XXX	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2020/11/03	Change drawing frame	-----	x.x ±0.40	XSR	2020/11/03	UNIT	mm	FB12-XXXXFAXXX-04
A0	2011/11/12	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	2.54 IDC TO 2.54 DIP Drawing
				Angle ± 3'			PROJ.	☉	Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com