

HSF

NOTES:

- 1.Current Rating:3.0A;
- 2.Voltage Rating:250V/AC ;
- 3.Contact Resistance: 20mΩ Max;
- 4.Withstand Voltage: 800V/AC;
5. Insulation Resistance: 1000MΩ (DC/500V);
- 6.Operating Temperature: -25℃ to +85℃;
7. Insulator Material:PPA,UL94V-0,NA;
- 8.Contact Material:Copper Alloy;
- 9.Contact plating:
80 μ " TIN on solder area,
50 μ " Nickel underplating overall;
10. Recommended process:
Wave soldering,Peak temperature:260±5℃,5s;

Ordering Information:

WF2013- 2 WS X XX T T 1

Dual Row

WS:180° DIP TYPE




Insulator Material
H=PPA

No. of Pins
05~20(see table)



Colour T=NATURAL

Package T:Tube

WCON internal code

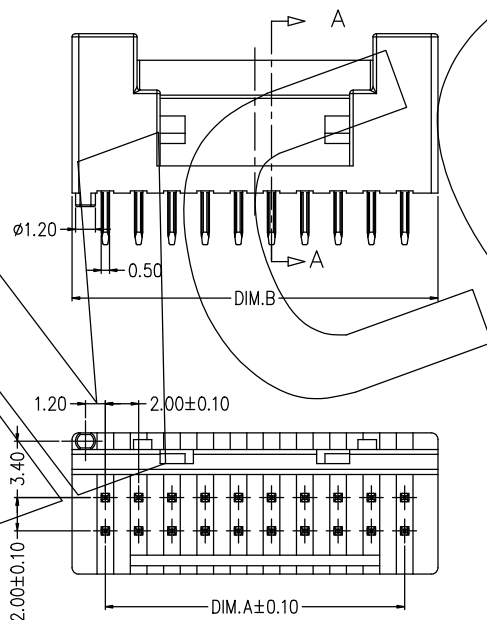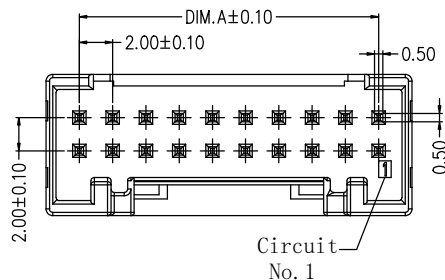

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

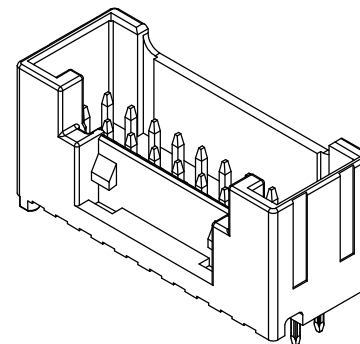
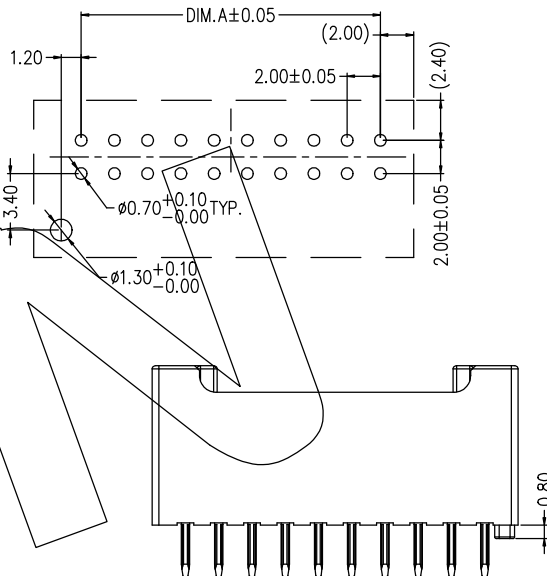


REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	WCON	
				X.X	±0.30							
A0	2023/01/10	NEW	---	X.XX	±0.25	Morris	2023/01/10	UNIT	mm	WF2013-2WSHXTT1	Http: www.wcon.com	
				X.XXX	±0.15	CHECK	DATE	SIZE	A4	TITLE:		
				Angle	±3°	APPROVE	DATE	SHEET	1/2	2.0mm WAFER J Type, Dual Row S/T Dip Type W/T Post	WCON-Dongguan Tel:+86 769 85358920 Fax:+86 769 85358915 E-mail:sales@wcon.com	
				DIM	TOL			PROJ.	⌀	Customer NO.	WCON-Kunshan Tel:+86 512 57468408 Fax:+86 512 57468468 E-mail:sales@wcon.com	



HSF

Table:



PART NO.	CKTS	DIM. A	DIM. B
WF2013-2WSH04TT1	2*4PIN	6.00	10.00
WF2013-2WSH05TT1	2*5PIN	8.00	12.00
WF2013-2WSH06TT1	2*6PIN	10.00	14.00
WF2013-2WSH07TT1	2*7PIN	12.00	16.00
WF2013-2WSH08TT1	2*8PIN	14.00	18.00
WF2013-2WSH09TT1	2*9PIN	16.00	20.00
WF2013-2WSH10TT1	2*10PIN	18.00	22.00
WF2013-2WSH11TT1	2*11PIN	20.00	24.00
WF2013-2WSH12TT1	2*12PIN	22.00	26.00
WF2013-2WSH13TT1	2*13PIN	24.00	28.00
WF2013-2WSH14TT1	2*14PIN	26.00	30.00
WF2013-2WSH15TT1	2*15PIN	28.00	32.00
WF2013-2WSH16TT1	2*16PIN	30.00	34.00
WF2013-2WSH17TT1	2*17PIN	32.00	36.00
WF2013-2WSH18TT1	2*18PIN	34.00	38.00
WF2013-2WSH19TT1	2*19PIN	36.00	40.00
WF2013-2WSH20TT1	2*20PIN	38.00	42.00





2*4~2*5PIN



2*8~2*9PIN



2*6~2*7PIN

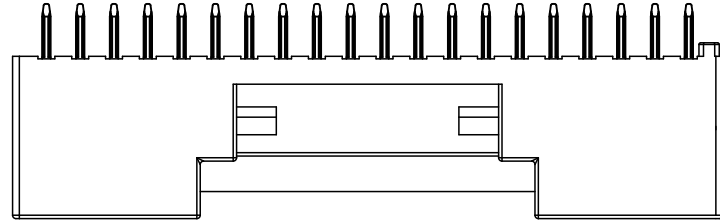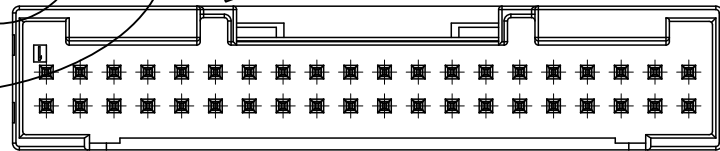

2*10~2*20PIN

				OPERATION		DRAW Morris	DATE 2023/01/10	SCALE	FIT	PART NO. WF2013-2WSHXXTT1	WCON Http: www.wcon.com	
				X. X	±0.30		CHECK	DATE	UNIT			
				X. XX	±0.25	APPROVE	DATE	SIZE	A4	2.0mm WAFER J Type, Dual Row S/T Dip Type W/T Post	WCON-Dongguan Tel:+86 769 85358920 Fax:+86 769 85358915 E-mail:sales@wcon.com	WCON-Kunshan Tel:+86 512 57468408 Fax:+86 512 57468468 E-mail:salesks@wcon.com
A0	2023/01/10	NEW	---	X. XXX	±0.15			SHEET	2/2			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	PROJ.						
				DIM	TOL							