






HSF

NOTES:
 Current Rating: 3.0AMP
 Voltage Rating: 250V
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 775V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55℃ to +105℃
 Contact Material: Copper alloy
 Contact plating:
 XXu"Glod on contact area(See ordering information).
 100u"Matte-Tin on solder area.
 50u"Nickel underplating overall.
 Insulator Material:LCP UL94V-0(Std)
 IR solidering,Peak temperature: 260±5℃, 5s

Ordering Information

3600 - P XXX - 063 R XX X 01

TYPE
 P: Plug
 No. of Pins(Total)
 010: 10PIN
 (02-60Pin)
 Insulator Height
 063: 6.35mm
 Contact Shape
 R: Right Angle
 Internal Code
 Packing:
 T: Tube
 R: Tape & Reel
 Contact Plating:
 W0=Gold Flash/Matte Tin
 W3=10u" Gold/Matte Tin
 W5=30u" Gold/Matte Tin

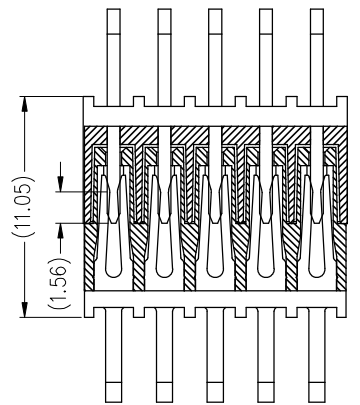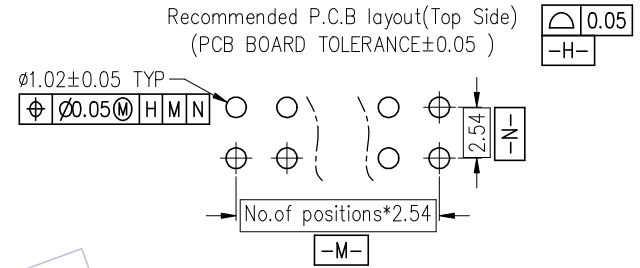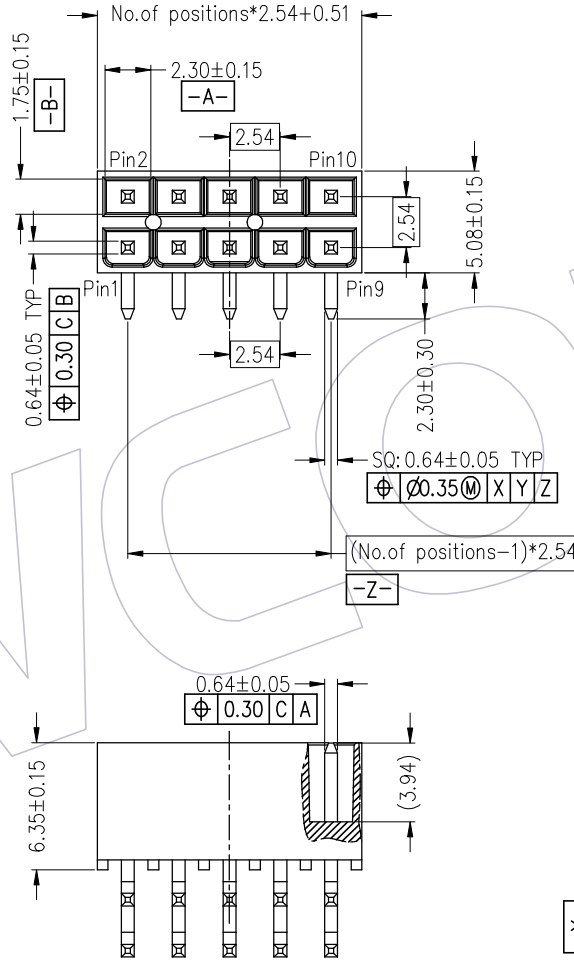

Female&Male mating

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
AO	2020/05/12	NEW	-----	x.x ±0.40	Bruce	2020/05/12	UNIT	mm	3600-PXXX-063RXXX01
				x.xx ±0.35	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/2	2.54mm Board to Board Conn., "S" Type, Plug, 90° DIP, H=6.35mm
				Angle ± 3'			PROJ.	Customer NO.	
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com