

HSF

NOTES:
 Current Rating: 3.0AMP
 Voltage Rating: 250V
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 775V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55℃ to +105℃
 Contact Material: Copper alloy
 Contact plating:
 XXu"Glod on contact area(See ordering information).
 100u"Matte-Tin on solder area.
 50u"Nickel underplating overall.
 Insulator Material:LCP UL94V-0(Std)
 IR soldering,Peak temperature: 260±5℃, 5s







Ordering Information

3600 - S XXX - 085 S XX X 01

TYPE
 S:Socket
 No.of Pins(Total)
 010:10PIN
 (02-60Pin)
 Insulator Height
 085:8.51mm
 Contact Shape
 S:180° DIP
 Internal Code
 Packing:
 T:Tube
 R:Tape&Reel
 Contact Plating:
 W0=Gold Flash/Matte Tin
 W3=10u" Gold/Matte Tin
 W5=30u" Gold/Matte Tin

Recommended P.C.B layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

0.05
 -H-

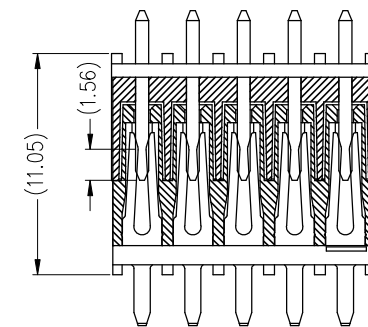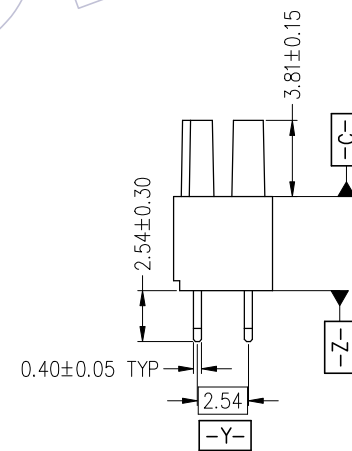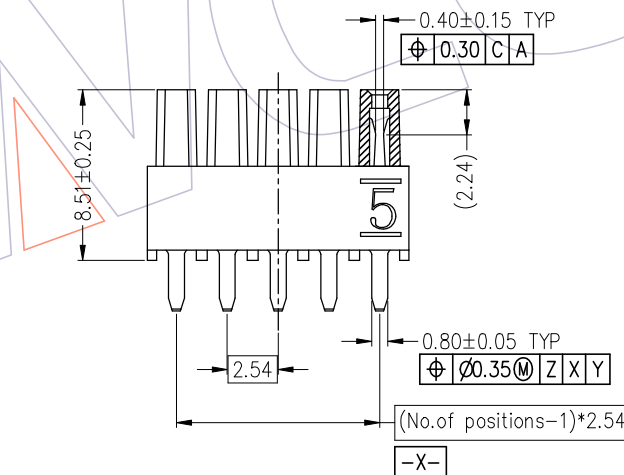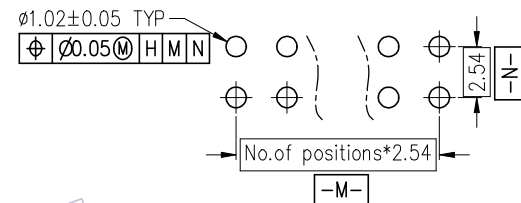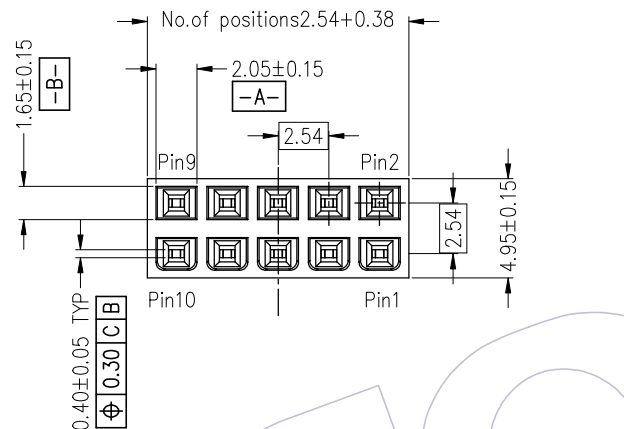

Female&Male mating

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
AO	2020/05/12	NEW	-----	x.x ±0.40	Bruce	2020/05/12	UNIT	mm	3600-SXXX-085SXXX01
				x.xx ±0.35	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/2	2.54mm Board to Board Conn., "S" Type,Socket,90°DIP,H=6.35mm
				Angle ± 3°			PROJ.	⌀	Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com