
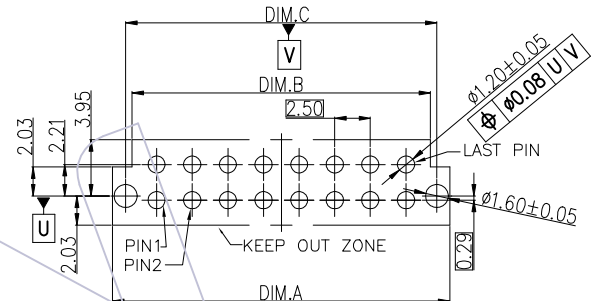




HSF





PRELIMINARY

NOTES:

- Rated Current: See Table;
- Voltage Rating: 250V ;
- Contact Resistance: Initial: 10mΩ Max.
Final: 20mΩ Max;
- Withstand Voltage: 1500V AC;
- Insulation Resistance: 1000MΩ Min;
- Operation Temperature: -40°C to +125°C;
- Contact Material: copper alloy;
- Contact Plating:
Under Plating Nickel 50u" ; Solder Area: Bright Tin 60u" Min;
Contact Area: Au Or Sn
- Insulator Body Material: LCP,G.F, UL94V-0 ;
- Recommended process:
Wave Solder, Peak temperature: 260±5°C.
- RoHS COMPLIANT.



RECOMMENDED PCB LAYOUT (CONNECTOR SIDE VIEW)
TOLERANCE ±0.05
THICKNESS: 1.60 TO 2.40 MM

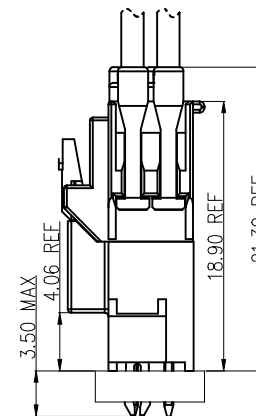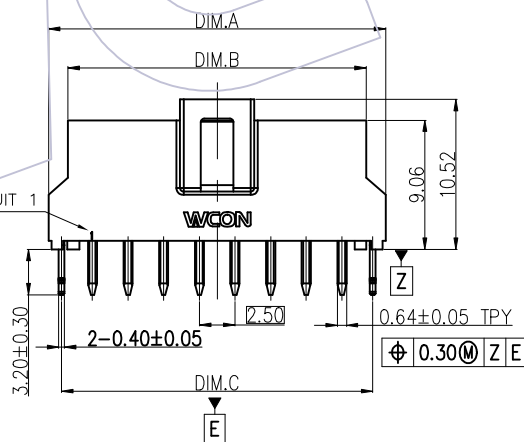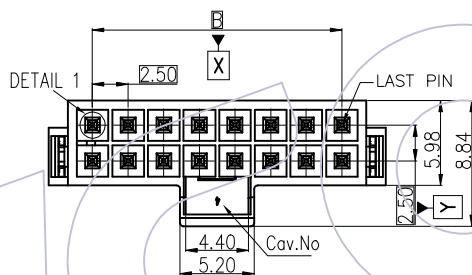

Ordering Information

WF 2508-2 WS H XX XX X X 2
 Dual Rows
 180° Dip
 High Temperature Plastic
 NO. Of Pins Per Row
 02 ~ 8 Pin

CIRCUIT 1

Package A=Tray
 Housing Color
 T=Natural
 B=Black
 Contact Plating
 S1=3u" Gold/Tin
 S4=15u" Gold/Tin
 S5=30u" Gold/Tin
 BLank=Bright Tin

Pin	DIM.		
	A	B	C
2*2	8.66	5.94	6.84
2*3	11.16	8.44	9.34
2*4	13.66	10.94	11.84
2*5	16.16	13.44	14.34
2*6	18.66	15.94	16.84
2*7	21.16	18.44	19.34
2*8	23.66	20.94	21.84

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	PART NO.
				x.x	±0.40				
				x.xx	±0.25	CHECK	DATE	UNIT	TITLE: 2.5*2.5mm Wafer Dual Rows, 180°DIP, W/T Lock
A0		NEW		x.xxx	±0.15	APPROVE	DATE	SHEET	
				Angle	± 3'		DATE	1/3	
				DIM	TOL			PROJ.	Customer NO.



WCON-Dongguan | WCON-Kunshan
 Tel: +86 769 85358920 | Tel: +86 512 57468408
 Fax: +86 769 85358911 | Fax: +86 512 57468468
 E-mail: sales@wcon.com | E-mail: salesks@wcon.com