

HSF

NOTES:

Current Rating: 1.0A AC,DC(AWG #26)

Voltage Rating: 50V AC,DC

Contact Resistance: 30mΩ Max



Withstanding Voltage: 500V AC/Minute

Insulation Resistance: 100MΩ Min

Temperature Range: -40℃ to +105℃ **A1**





Material: PA66(UL94V-0)

Color: White

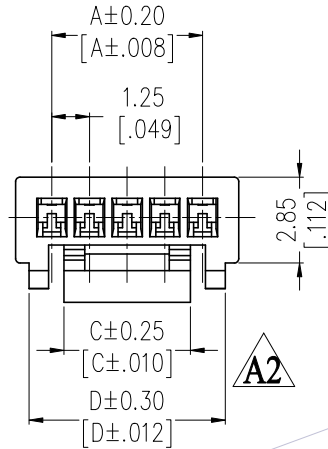

2P

A2

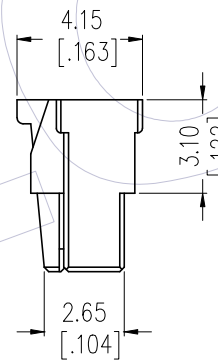

Circuits	Dimensions			
	A	B	C	D
2	1.25	3.65	1.90	-
3	2.50	4.90	3.10	-
4	3.75	6.15	4.20	-
5	5.00	7.40	4.20	6.50
6	6.25	8.65	6.25	8.65
7	7.50	9.90	6.25	8.50
8	8.75	11.15	6.25	8.75
9	10.00	12.40	6.25	8.75
10	11.25	13.65	8.20	10.70
11	12.50	14.90	8.20	10.70
12	13.75	16.15	8.20	10.70
13	15.00	17.40	8.20	10.70
14	16.25	18.65	8.20	10.70
15	17.50	19.90	8.20	10.70

Ordering Information

WF1256- H XX W 0 1

No. of Pins: 02-15P
 Colour: W:White
 Packing: 0=PE bag

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2022.08.17	Add Dim C/Dim D	ZHLL	X.X ±0.40	LKP	2012.12.13	UNIT	mm [inch]	WF1256-HXXW01
A1	2021.08.10	Modify	HUJ	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: WAFER 1256 HOUSING
AO	2021.05.17	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/2	Customer NO.
				Angle ± 3°			PROJ.	⌀	
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com