

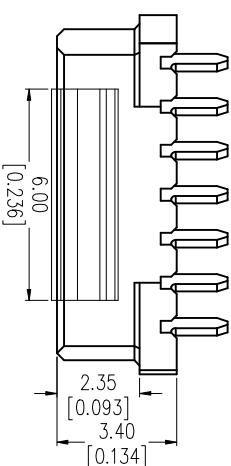


HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

NOTES:

Voltage Rating: 50V AC/DC
Current Rating: 0.5AMP
Contact Resistance: 20m Ω max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 500M Ω min
Operation Temperature: -40°C to +105°C




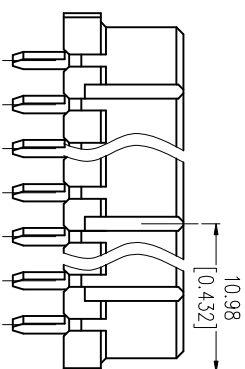


Contact Material: Phosphor Bronze

Contact Plating: 100~200u" Tin Plated Over

50~80u" Nickel

Insulator Material: PA9T+33%GF UL94V-0 Black

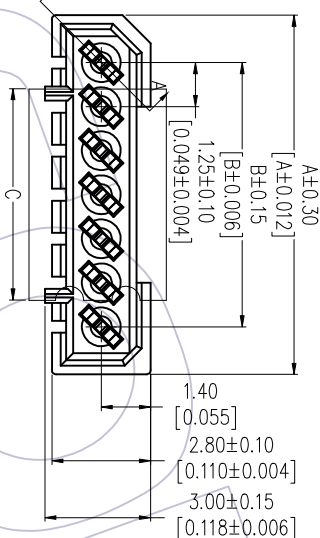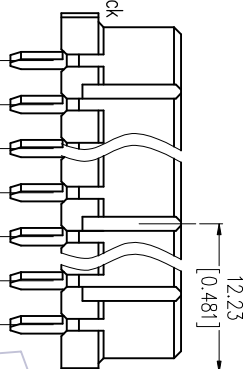

Ordering Information





3652-S XXX - 034 XX R04

No of Pins
004: 04 Pin
005: 05 Pin
006: 06 Pin
007: 07 Pin
008: 08 Pin
010: 10 Pin
017: 17 Pin
020: 20 Pin

Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

Packing
R=Tape&Reel

1.25±0.10
[0.049±0.004]

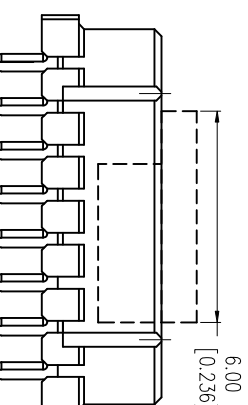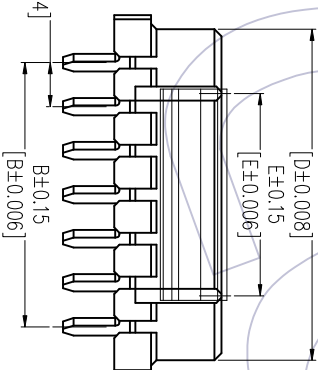

21.99	25.65	23.75	26.45	20
18.24	21.90	20.00	22.70	17
9.49	13.15	11.25	13.95	10
6.99	10.65	8.75	11.45	8
5.74	9.40	7.50	10.20	7
4.49	8.15	6.25	8.95	6
3.24	6.90	5.00	7.70	5
1.99	5.65	3.75	6.45	4
E	D	B	A	PIN数

Pos	PART NO.	DIM C
4-7PIN	CAP2521-M201	6.00
8-10PIN	CAP2300-G101	6.00
17-20PIN	CAP2521-M201	6.00

A3	2020.09.03	Add CAP	DuYing	OPERATION	DRAW	SCALE	FIT	PART NO.	WCN-Dongguan	WCN-Kunshan
A2	2017.12.20	Modify	Ding	X.X	DuYing	2020.09.03	mm	3652-SXXX-034XXR04	Tel: +86 769 85358920	Tel: +86 512 57468408
A1	2017.07.11	DIP: 1.30±0.25 → 1.45±0.25	----	X.XX	CHECK	DATE	A4	TITLE:	1.25mm BTB FEMALE, 180° DIP, H=3.4	Fax: +86 769 85358915
A0	2016.10.20	NEW	----	X.XXX	APPROVE	DATE	1/1	Customer NO.	W/O POST	Fax: +86 512 57468468
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	DATE	PROJ.				E-mail: sdes@wcon.com
				± 3°						E-mail: sdesks@wcon.com
				TOL.						

WCON

Http: www.wcon.com