
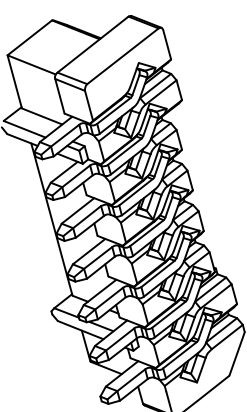

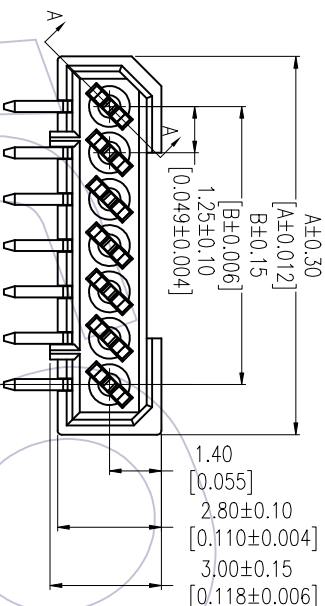
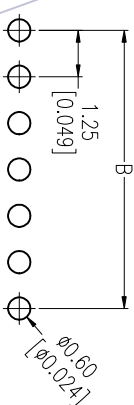

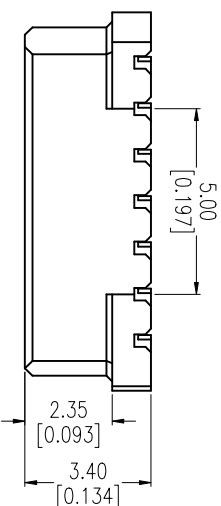


HSF

NOTES:

Voltage Rating: 50V AC/DC
Current Rating: 0.5AMP
Contact Resistance: 20mΩ max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 500MΩ min
Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze
Contact Plating: 100~200u" Tin Plated Over
50~80u" Nickel
Insulator Material: PA9T+33%GF UL94V-0 BLACK






Ordering Information

3652-S XXX - 034 XX R03

No. of Pins
004: 04 Pin
005: 05 Pin
006: 06 Pin
007: 07 Pin
008: 08 Pin
010: 10 Pin
017: 17 Pin
020: 20 Pin

Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

Packing
R=Tape&Reel

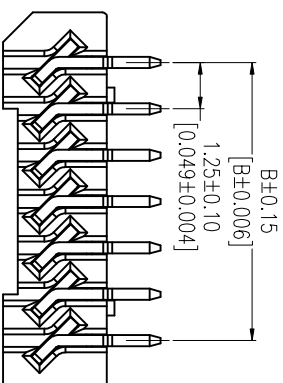

21.99	25.65	23.75	26.45	20
18.24	21.90	20.00	22.70	17
9.49	13.15	11.25	13.95	10
6.99	10.65	8.75	11.45	8
5.74	9.40	7.50	10.20	7
4.49	8.15	6.25	8.95	6
3.24	6.90	5.00	7.70	5
1.99	5.65	3.75	6.45	4
E	D	B	A	PIN数

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A1	2017.12.19	Modi fy	----	X.X	±0.40	2017.12.19	mm	A4	3652-SXXX-034XXR03	1.25mm BTB FEMALE, 90° DTP, H=3.4, 不带柱	
A0	2016.10.20	NEW	----	X.XXX	±0.25		mm	A4			
				Angle	± 3°		SHEET	1/1			
				DIM	TOL		PROJ.				

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com