

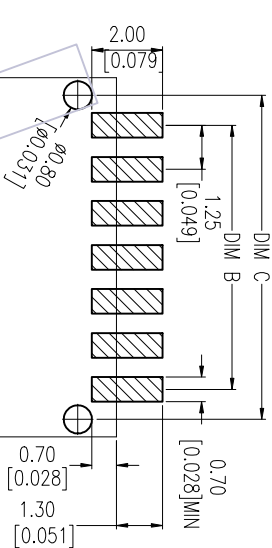
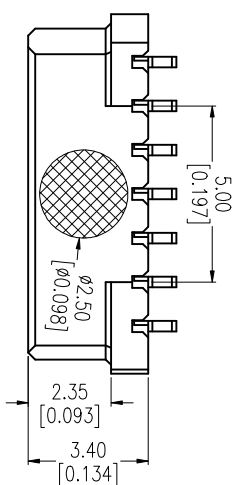



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)



Voltage Rating: 50V AC/DC
Current Rating: 0.5A/MP
Contact Resistance: 20mΩ max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 500MΩ min
Operation Temperature: -40°C to +105°C



Technical drawing of a shaft-hub assembly. A surface texture symbol is shown on the shaft surface, indicating a texture with a maximum height of 0.10. Dimension lines indicate a distance of 0.05 [0.002] from the shaft centerline to the start of the textured area, and a total length of 4.20 [0.165] for the textured section.

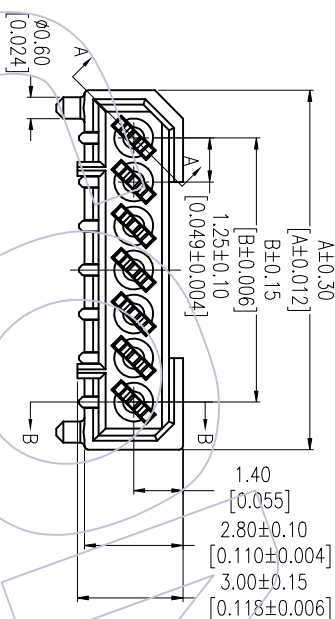

3652-S XXX - 034 XX R0X

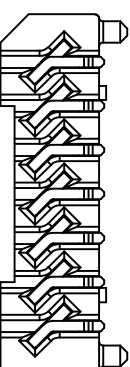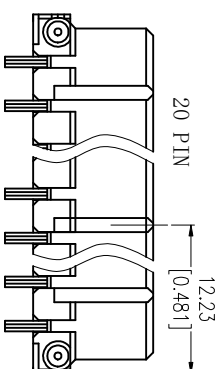

						3652-SXXX-034SNR01	W/O	POST
						3652-SXXX-034SNR02	W/T	POST
21.99	25.65	25.45	23.75	26.45	20			
18.24	21.90	21.70	20.00	22.70	17			
9.49	13.15	12.95	11.25	13.95	10			
6.99	10.65	10.45	8.75	11.45	8			
5.74	9.40	9.20	7.50	10.20	7			
4.49	8.15	7.95	6.25	8.95	6			
3.24	6.90	6.70	5.00	7.70	5			
1.99	5.65	5.45	3.75	6.45	4			
E	D	C	B	A	PIN#			

			OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: 57468468 E-mail: sales@wcon.com E-mail: sales@wcon.com
			X.X	±0.40	Dwg	2017. 12. 19	UNIT	mm	3652-SXXX-034SNROX	
A1	2017. 12. 19	Modify	X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE:	
A0	2016. 10. 20	NEW	X.XXX	±0.15			SHEET	1/1	1. 25mm BTB FEMALE, 90 ° SMT H=3.4	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3° DIM TOL	APPROVE	DATE			Customer NO.	