

HSF

NOTES:

Current Rating: 3.0A(AWG#22)

Voltage Rating: 250V AC/DC

Contact Resistance: 20mΩ Max

Withstand Voltage: 800V AC/Minute





Insulation Resistance: 1000MΩ Min

Operation Temperature: -40℃ to +105℃

Insulator Material: PA66 UL94V-0 White

Used With: WF2002-TPXX0X

Mated With: WF2018-Wafer

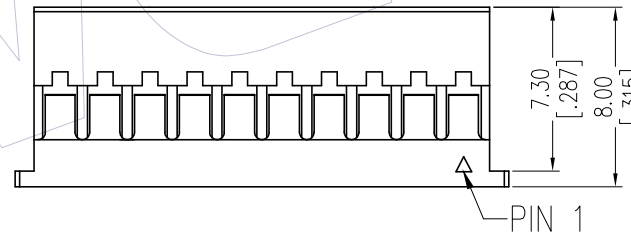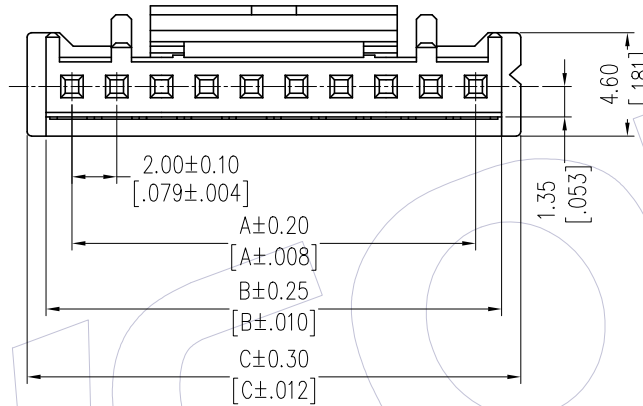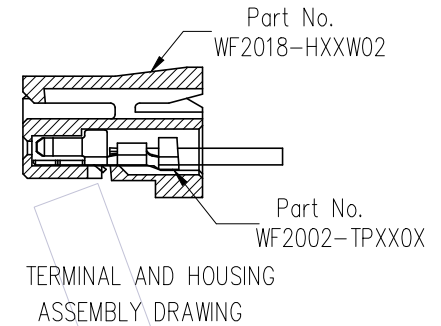


PIN.	DIM		
	A	B	C
2P	2.00	4.30	6.00
3P	4.00	6.30	8.00
4P	6.00	8.30	10.00
5P	8.00	10.30	12.00
6P	10.00	12.30	14.00
7P	12.00	14.30	16.00
8P	14.00	16.30	18.00
9P	16.00	18.30	20.00
10P	18.00	20.30	22.00
11P	20.00	22.30	24.00
12P	22.00	24.30	26.00
13P	24.00	26.30	28.00
14P	26.00	28.30	30.00
15P	28.00	30.30	32.00

Ordering Information


WF2018 - H XX W 0 2

No. of Pins Packing:
02~15P 0=Bag


REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com WCON-Dongguan WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: salesks@wcon.com
				X.X ±0.40	HUJJ	2022.08.30	UNIT	mm [inch]	WF2018-HXXW02	
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:	
A0	2022.08.30	NEW	-----	X.XXX ±0.15			SHEET	1/2	J Type 2.00 Housing Single Row	
				Angle ± 3°	APPROVE	DATE	PROJ.	Customer NO.		
				DIM TOL						

HSF


Standard Polarization For Receptacles




2P




3P




4P




5P




6P




7P




8P



9P




10P




11P




12P




13P



14P



15P

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X ±0.40	HUJJ	2022.08.30	UNIT	mm [inch]	WF2018-HXXW02		
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:		
				X.XXX ±0.15	APPROVE	DATE	SHEET	2/2	J Type 2.00 Housing Single Row		
AO	2022.08.30	NEW	-----	Angle ± 3°			PROJ.	Customer NO.			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL							