



HSF

NOTES:

Current Rating: 1.0AMP(AWG#26)
Voltage Rating: 50V
Contact Resistance: 30mΩ Max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 100MΩ Min
Operation Temperature: -40℃ to +105℃

Housing Material: High Temperature Plastic(UL94V-0)
Contact Material: Phosphor Bronze
Contact Plating: Au Over Ni

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ±0.05)


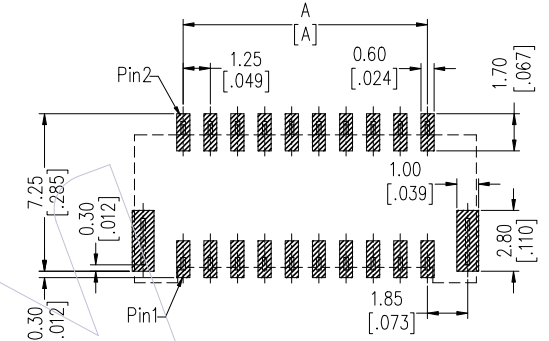
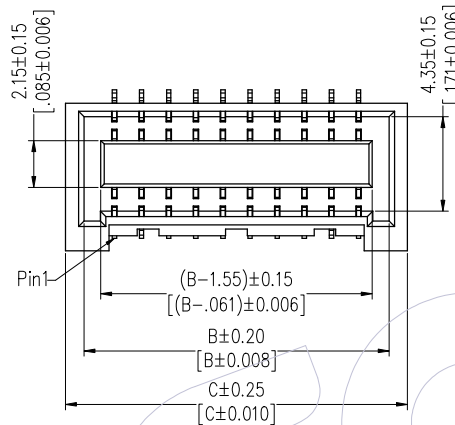
**Ordering Information****WF1256-2WM XX XX E R 1**

No. of pins:
2*5P-2*20P

Contact Plating:
G1=3u" Gold
G3=10u" Gold
G5=30u" Gold

Color:
E=Natural

Packing:
R=Tape&Reel

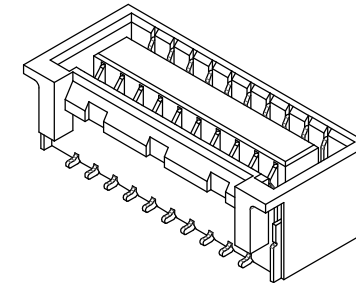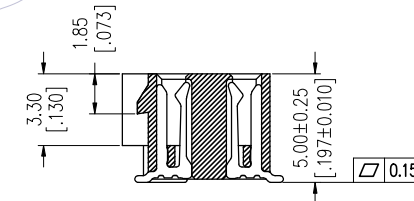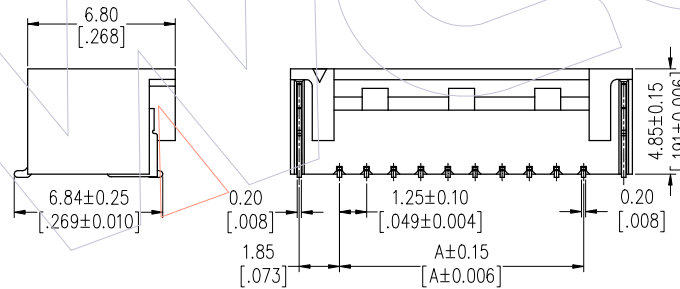

Pins	DIM		
	A	B	C
2*05	5.00	7.80	9.50
2*06	6.25	9.05	10.75
2*07	7.50	10.30	12.00
2*08	8.75	11.55	13.25
2*09	10.00	12.80	14.50
2*10	11.25	14.05	15.75
2*11	12.50	15.30	17.00
2*12	13.75	16.55	18.25
2*13	15.00	17.80	19.50
2*14	16.25	19.05	20.75
2*15	17.50	20.30	22.00
2*16	18.75	21.55	23.25
2*17	20.00	22.80	24.50
2*18	21.25	24.05	25.75
2*19	22.50	25.30	27.00
2*20	23.75	26.55	28.25

				OPERATION		DRAW ZHLL	DATE 2020.11.23	SCALE	1:1	PART NO. WF1256-2WMXXXXER1	WCON Http: www.wcon.com	
				X.X	±0.40			UNIT	mm inch			
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.25mm Pitch Wafer Dual Row 180° SMT	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468408 E-mail: salesks@wcon.com
A0	2020.11.23	NEW	-	X.XXX	±0.15			APPROVE	DATE			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PROJ.						