

HSE

NOTES:

Rated Current:3.0A

Contact Resistance: 20m Ω max

Withstand Voltage:1000V AC/Minute



Insulation Resistance: 1000M Ω min

Operation Temperature: -45°C to $+105^{\circ}\text{C}$

Contact Material:Brass

Contact plating: Au Or Sn Over Ni

Insulator Material: PA66 (UL94V-0)

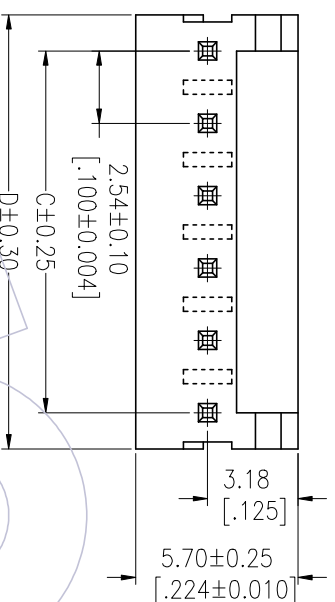


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		C	D
02	WF2544-WS02XX1	2.54	5.08
03	WF2544-WS03XX1	5.08	7.62
04	WF2544-WS04XX1	7.62	10.16
05	WF2544-WS05XX1	10.16	12.70
06	WF2544-WS06XX1	12.70	15.24
07	WF2544-WS07XX1	15.24	17.78
08	WF2544-WS08XX1	17.78	20.32
09	WF2544-WS09XX1	20.32	22.86
10	WF2544-WS10XX1	22.86	25.40
11	WF2544-WS11XX1	25.40	27.94
12	WF2544-WS12XX1	27.94	30.48
13	WF2544-WS13XX1	30.48	33.02
14	WF2544-WS14XX1	33.02	35.56
15	WF2544-WS15XX1	35.56	38.10
16	WF2544-WS16XX1	38.10	40.64
17	WF2544-WS17XX1	40.64	43.18
18	WF2544-WS18XX1	43.18	45.72
19	WF2544-WS19XX1	45.72	48.26
20	WF2544-WS20XX1	48.26	50.80
21	WF2544-WS21XX1	50.80	53.34
22	WF2544-WS22XX1	53.34	55.88
23	WF2544-WS23XX1	55.88	58.42
24	WF2544-WS24XX1	58.42	60.96
25	WF2544-WS25XX1	60.96	63.50
26	WF2544-WS26XX1	63.50	66.04
27	WF2544-WS27XX1	66.04	68.58
28	WF2544-WS28XX1	68.58	71.12

Ordering Information

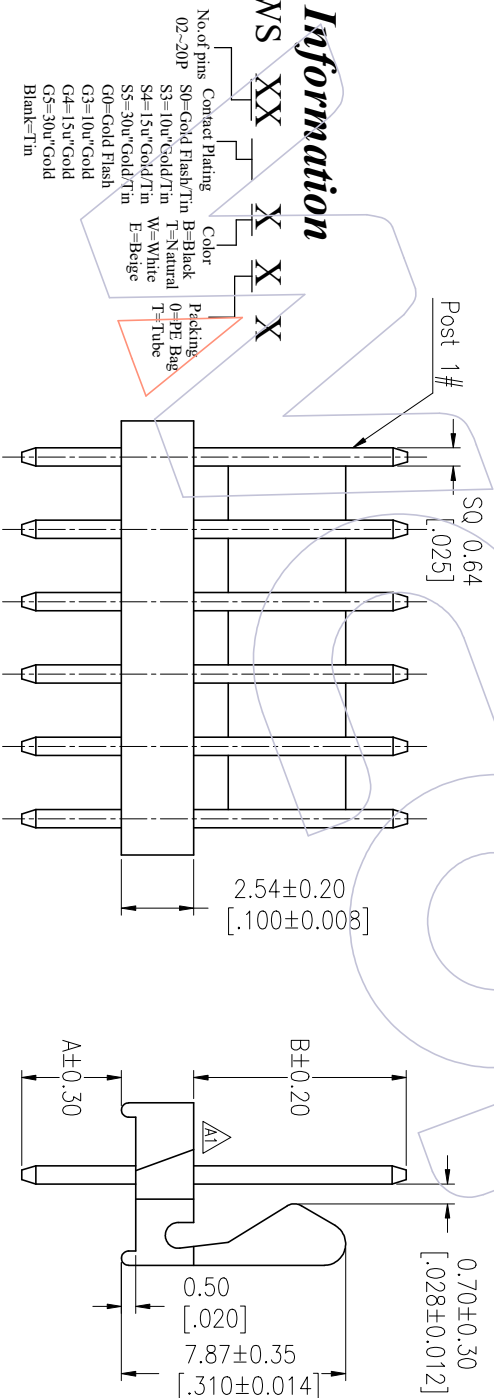WF2544 - WS ~~XX~~ X X X

ITEM	A	B
Standard	3.60	7.36
Alternate		

[illegible]