

HSE

NOTES:

Rated Current:3.0AMP

Contact Resistance: 20m Ω max

Withstand Voltage:1000V AC/DC



Insulation Resistance: 1000M Ω min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass

Contact plating: Au Or Sn Over Ni

Insulator Material: PA66(UL94V-0)

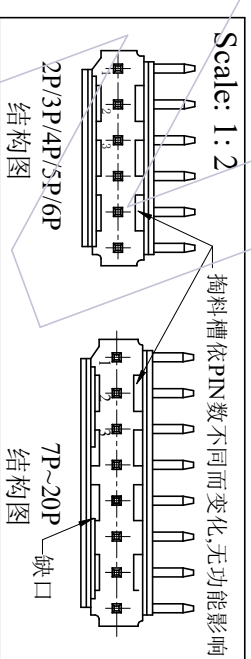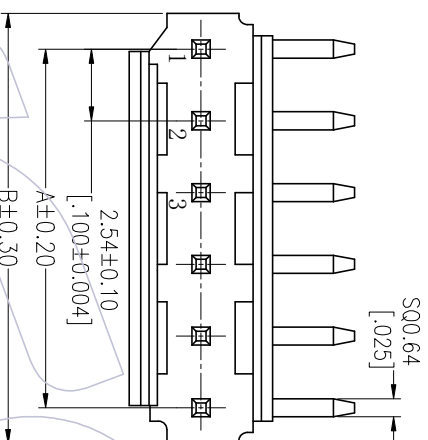

Ordering Information

WF2547-1 WR XX XX X



Single Row 02P~20P

S0=Gold Flash/Tin

1 W=White

~~0=PE Bag~~

S3=10u"Gold/Tin U=Blue
S4=15u"Gold/Tin B=Black



$$T = T_{\text{tube}}$$

S5=30u"Gold/T
G0=Gold/Elasb

in

G3=10u"Gold

G5=30u"Gold

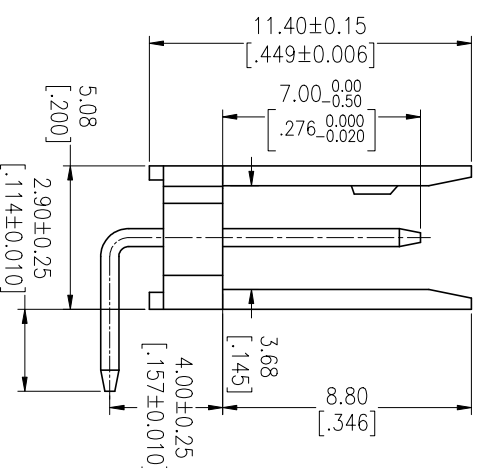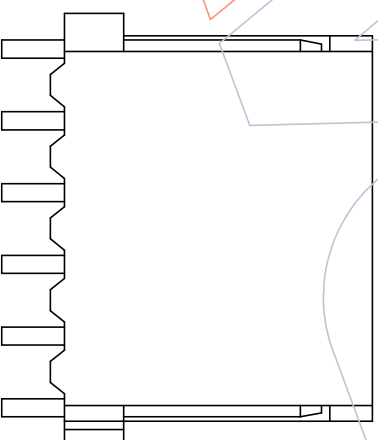

Circuit	Port No.	Dimension	
		A	B
02	WF2547-1MR02XX1	2.54	5.08
03	WF2547-1MR03XX1	5.08	7.62
04	WF2547-1MR04XX1	7.62	10.16
05	WF2547-1MR05XX1	10.16	12.70
06	WF2547-1MR06XX1	12.70	15.24
07	WF2547-1MR07XX1	15.24	17.78
08	WF2547-1MR08XX1	17.78	20.32
09	WF2547-1MR09XX1	20.32	22.86
10	WF2547-1MR10XX1	22.86	25.40
11	WF2547-1MR11XX1	25.40	27.94
12	WF2547-1MR12XX1	27.94	30.48
13	WF2547-1MR13XX1	30.48	33.02
14	WF2547-1MR14XX1	33.02	35.56
15	WF2547-1MR15XX1	35.56	38.10
16	WF2547-1MR16XX1	38.10	40.64
17	WF2547-1MR17XX1	40.64	43.18
18	WF2547-1MR18XX1	43.18	45.72
19	WF2547-1MR19XX1	45.72	48.26
20	WF2547-1MR20XX1	48.26	50.80

[illegible]