

HSF

NOTES:

Rated Current:3A

Rated Voltage:250V AC/DC

Contact Resistance:20mΩ max

Withstand Voltage:1000V AC/Minute


Insulation Resistance:1000MΩ min

Operation Temperature:-40℃ to+105℃


Contact Material:Brass

Contact Plating:Au Or Sn over Ni

Insulator Material:PA46+15%G.F (UL94V-0)

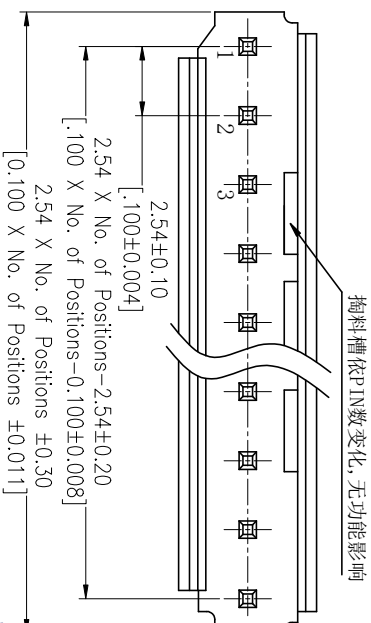

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

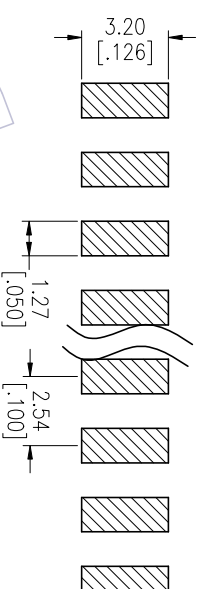


Ordering Information

WF2547-1WZ XX XX X 1

No. of Row No. of pins Contact Plating
Single Row 02P-20P S0=Gold Flash/Tin B=Black R=REFL
S3=10u"Gold/Tin T=Natural T=Ti/BE

S4=15u"Gold/Tin
S5=30u"Gold/Tin
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
SM=Matte Tin

SQ0.64±0.02
[0.025±0.001]

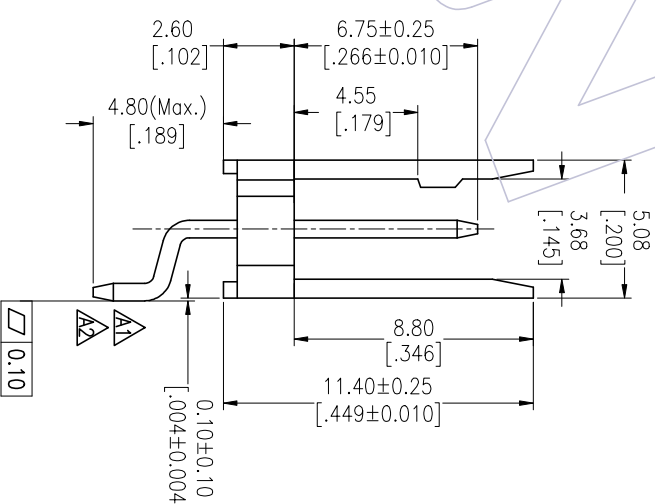

		OPERATION		DRAW		SCALE		PART NO.		 Http: www.wcon.com WCON-Dongguan WCON-Kunshan	
		JYHuang		DATE		UNIT		TITLE:			
		CHECK		DATE		mm		2.54 WAFER SINGLE ROW 90° SMT			
		APPROVE		DATE		A4		"T" TYPE			
		± 3°				1/1		Customer NO.			
		DIM		TOL		PROJ.					